



33-Channel Multiple Switch Detection Interface with Programmable Current

CD1030


Last Updated: Dec 22, 2022

The CD1030 is a multiple switch detection interface (MSDI) designed to detect the closing and opening of up to 33 switch contacts. The switch status, either open or closed, is transferred to the microprocessor through a SPI in automotive environments.

- This SMARTMOS® device features a 35-to-1 analog multiplexer for reading analog inputs.
- The analog input signal is buffered and provided on the analog multiplexer (AMUX) output pin for the MCU to read
- Individually selectable input currents are available in Normal and Low-Power Mode
- Battery and temperature monitor are included in the IC and available via the AMUX pin
- Interfaces with any MCU that supports SPI communications

CD1030 Block Diagram Block Diagram

CD1030 FUNCTIONAL INTERNAL BLOCK DIAGRAM

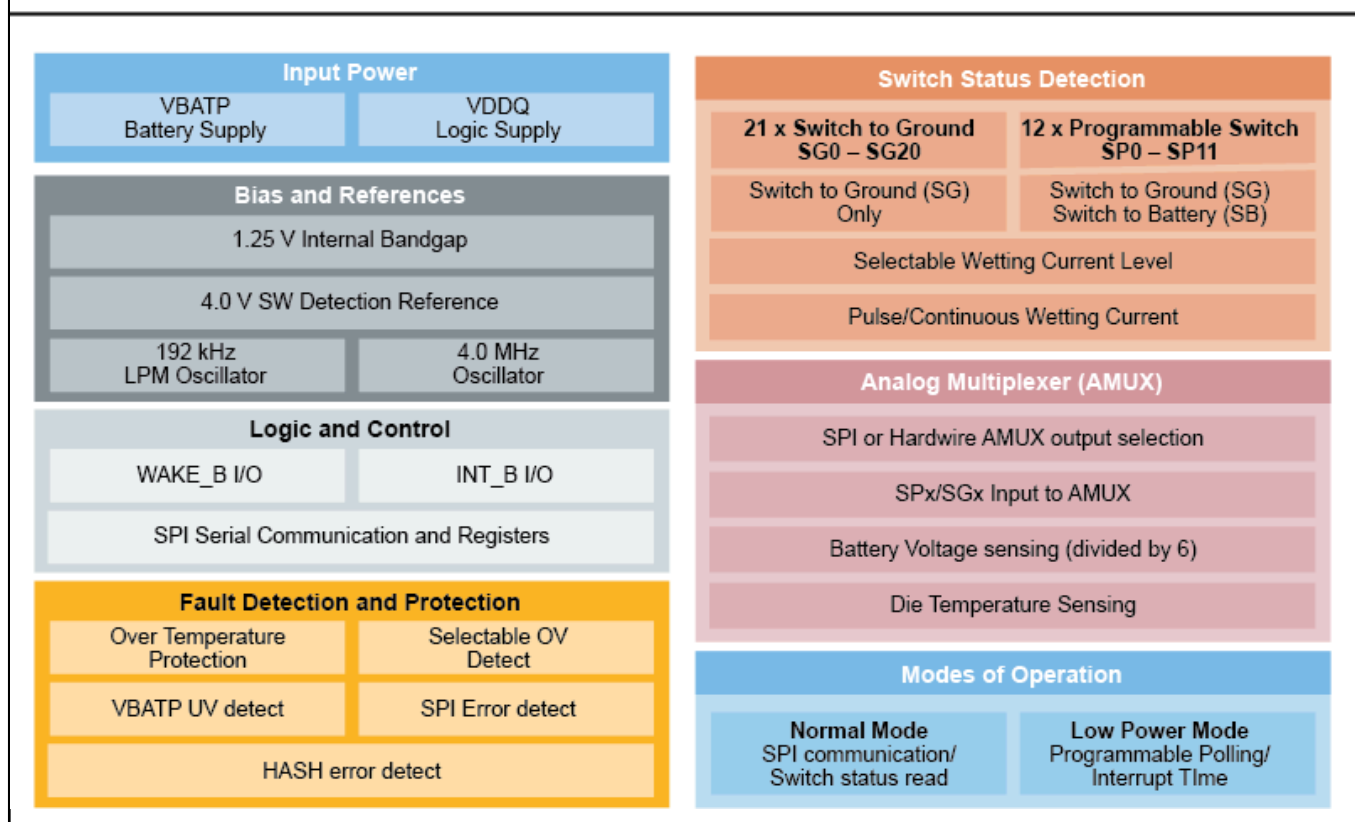

View additional information for [33-Channel Multiple Switch Detection Interface with Programmable Current](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.