

# Additional SPE Instructions for Devices that Support VLE

by: Robert Moran  
MSG Applications Group

## Contents

## 1 Introduction

### 1.1 Abstract

The signal processing engine (SPE) for the MPC5500 family provides an instruction set for DSP operations that require multiple data operations in a single instruction. This engineering bulletin describes additional SPE instructions that are implemented on devices with an e200z3 or e200z6 core that supports VLE.

These additional SPE instructions allow a single instruction to perform a vector floating point single precision positive or negative multiply operation along with either an add or subtract. These instructions allow for simpler coding of multiply/accumulate operations typically used in filter algorithms.

1	Introduction .....	1
1.1	Abstract .....	1
2	Devices Affected by New Instructions .....	2
2.1	Instructions Op Codes .....	2
2.2	Instruction Descriptions .....	3

## 2 Devices Affected by New Instructions

e200z6 and e200z3 cores that support VLE have additional instructions available in the traditional Power Architecture instruction set.

These instructions perform SPE operations and are currently implemented on the following devices:

Table 1.

Device	Core	VLE Support	Additional SPE Instructions
MPC5533	e200z3	Yes	Yes
MPC5534	e200z3	Yes	Yes
MPC5554	e200z6	No	No
MPC5553	e200z6	No	No
MPC5565	e200z6	Yes	Yes
MPC5566	e200z6	Yes	Yes
MPC5567	e200z6	Yes	Yes

For backwards compatibility to devices that do not support VLE, do not use these new SPE instructions. Compilers may provide a switch to allow or to not allow use of these additional instructions.

### 2.1 Instructions Op Codes

The op codes of the additional instructions are listed in [Table 2](#).

Table 2. Op Codes of Additional SPE Instructions

Instruction Bit Coding	0.....5	6.....10	11.....15	16.....20	21.....31
evfsmadd	4 (0b0001_00)	RD	RA	RB	0b010_1000_0010
evfmsub	4 (0b0001_00)	RD	RA	RB	0b010_1000_0011
evfsnmadd	4 (0b0001_00)	RD	RA	RB	0b010_1000_1010
evfsnmsub	4 (0b0001_00)	RD	RA	RB	0b010_1000_1011
efsmadd	4 (0b0001_00)	RD	RA	RB	0b010_1100_0010
efmsub	4 (0b0001_00)	RD	RA	RB	0b010_1100_0011
efsnmadd	4 (0b0001_00)	RD	RA	RB	0b010_1100_1010
efsnmsub	4 (0b0001_00)	RD	RA	RB	0b010_1100_1011
















**efsnmadd****efsnmadd**

Floating-Point Single-Precision Negative Multiply-Add

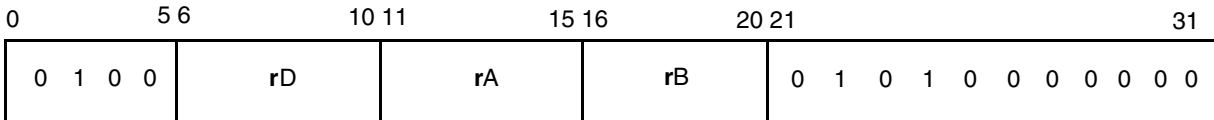**efsnmadd** rD,rA,rB

$$rD_{0:31} \leftarrow ((rA_{0:31} \times rB_{0:31} -_{sp} rD_{0:31})$$

$$rD_{32:63} \leftarrow ((rA_{32:63} \times rB_{32:63} -_{sp} rD_{32:63})$$

The low element of **rA** is multiplied by the low element of **rB**, the intermediate product is added to the low element of **rD**, and the negated result is stored in the low element of **rD**. If **rA** or **rB** are either zero or denormalized, the intermediate product is a properly signed zero.

Otherwise, if **rA** or **rB** are either NaN or infinity, the intermediate product is either *pmax* (asign==bsign), or *nmax* (asign!=bsign), and this value is used for the result and stored into **rD**. Otherwise, the intermediate product is added to the corresponding element of **rD**, and the final result is negated.

If **rD** is NaN or infinity, the result is either *nmax* (dsign==0), or *pmax* (dsign==1). Otherwise, if an overflow occurs, then *pmax* or *nmax* (as appropriate) is stored in **rD**. If an underflow occurs, then -0 (for rounding modes RN, RZ, RP) or +0 (for rounding mode RM) is stored in **rD**.

Exceptions:

If the contents of **rA** or **rB** are Infinity, Denorm, or NaN, the SPEFSCR[FINV] bit is set. If SPEFSCR[FINVE] is set, an exception is taken, and the destination register is not updated. Otherwise, if an overflow occurs, then the SPEFSCR[FOVF] bit is set, or if an underflow occurs, then the SPEFSCR[FUNF] bit is set. If either underflow or overflow exceptions are enabled and the corresponding bit is set, an exception is taken. If any of these exceptions are taken, the destination register is not updated.

If the result of this instruction is inexact or if an overflow occurs but overflow exceptions are disabled, and no other exception is taken, the SPEFSCR[FINXS] bit will be set. If the Floating-point Inexact exception is enabled, an exception is taken using the Floating-point Round exception vector. In this case, the destination register is updated with the truncated result, the FG and FX bits are properly updated to allow rounding to be performed in the exception handler, and the FGH and FXH bits are cleared.


FGH, FXH, FG and FX will be cleared if an overflow, underflow, or invalid operation/input error is signaled, regardless of enabled exceptions.

### efsnmsub

### efsnmsub

Floating-Point Single-Precision Negative Multiply-Subtract

efsnmsub rD,rA,rB

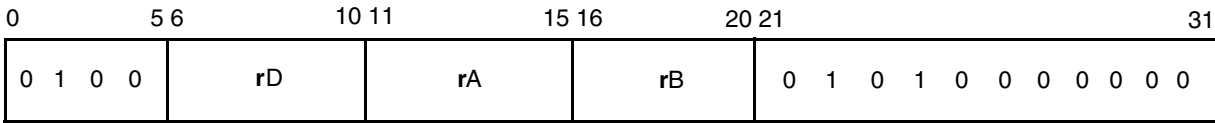

$$rD_{0:31} \leftarrow ((rA_{0:31} \times rB_{0:31} -_{sp} rD_{0:31})$$

$$rD_{32:63} \leftarrow ((rA_{32:63} \times rB_{32:63} -_{sp} rD_{32:63})$$

The low element of element of **rA** is multiplied by the low element of **rB**. The low element of **rD** is subtracted from the intermediate product, and the negated result is stored in the low element of **rD**. If **rA** or **rB** are either zero or denormalized, the intermediate product is a properly signed zero.

Otherwise, if **rA** or **rB** are either NaN or infinity, the intermediate product is either *pmax* (asign==bsign), or *nmax* (asign!=bsign), and this value is negated to obtain the result and is stored into **rD**. Otherwise, the low element of **rD** is subtracted from the intermediate product, and the final result is negated. If **rD** is NaN or infinity, the final result is either *pmax* (dsign==0), or *nmax* (dsign==1). Otherwise, if an overflow occurs, then *pmax* or *nmax* (as appropriate) is stored in **rD**. If an underflow occurs, then -0 (for rounding modes RN, RZ, RP) or +0 (for rounding mode RM) is stored in **rD**.

Exceptions:

If the contents of **rA** or **rB** are Infinity, Denorm, or NaN, the SPEFSCR[FINV] bit is set. If SPEFSCR[FINVE] is set, an exception is taken, and the destination register is not updated. Otherwise, if an overflow occurs, then the SPEFSCR[FOVF] bit is set, or if an underflow occurs, then the SPEFSCR[FUNF] bit is set. If either underflow or overflow exceptions are enabled and the corresponding bit is set, an exception is taken. If any of these exceptions are taken, the destination register is not updated.

If the result of this instruction is inexact or if an overflow occurs but overflow exceptions are disabled, and no other exception is taken, the SPEFSCR[FINXS] bit will be set. If the Floating-point Inexact exception is enabled, an exception is taken using the Floating-point Round exception vector. In this case, the destination register is updated with the truncated result, the FG and FX bits are properly updated to allow rounding to be performed in the exception handler, and the FGH and FXH bits are cleared.

FGH, FXH, FG and FX will be cleared if an overflow, underflow, or invalid operation/input error is signaled, regardless of enabled exceptions.

THIS PAGE IS INTENTIONALLY BLANK

**How to Reach Us:****Home Page:**

[www.freescale.com](http://www.freescale.com)

**Web Support:**

<http://www.freescale.com/support>

**USA/Europe or Locations Not Listed:**

Freescale Semiconductor, Inc.  
Technical Information Center, EL516  
2100 East Elliot Road  
Tempe, Arizona 85284  
+1-800-521-6274 or +1-480-768-2130  
[www.freescale.com/support](http://www.freescale.com/support)

**Europe, Middle East, and Africa:**

Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
[www.freescale.com/support](http://www.freescale.com/support)

**Japan:**

Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

**Asia/Pacific:**

Freescale Semiconductor Hong Kong Ltd.  
Technical Information Center  
2 Dai King Street  
Tai Po Industrial Estate  
Tai Po, N.T., Hong Kong  
+800 2666 8080  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

**For Literature Requests Only:**

Freescale Semiconductor Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
1-800-441-2447 or 303-675-2140  
Fax: 303-675-2150  
[LDCForFreescaleSemiconductor@hibbertgroup.com](mailto:LDCForFreescaleSemiconductor@hibbertgroup.com)

Document Number: EB689  
Rev. 0  
2/2008

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

RoHS-compliant and/or Pb-free versions of Freescale products have the functionality and electrical characteristics as their non-RoHS-compliant and/or non-Pb-free counterparts. For further information, see <http://www.freescale.com> or contact your Freescale sales representative.

For information on Freescale's Environmental Products program, go to <http://www.freescale.com/epp>.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.  
© Freescale Semiconductor, Inc. 2008. All rights reserved.