




Industrial HMI

Last Updated: Feb 26, 2025

Powered by an industrial grade i.MX microprocessor, NXP provides HMI solutions for harsh industrial environments. These devices are power-on tested to emulate years of 24/7 operation for critical applications where accuracy, performance, and operational longevity are important factors. When coupled with industrial grade microcontrollers and interface peripherals, NXP HMI solutions offer industrial temperature grades compliance and noisy environment resiliency. This allows for HMI interfaces that are robust and proven to work in suboptimal conditions.

HMI High Tier Block Diagram

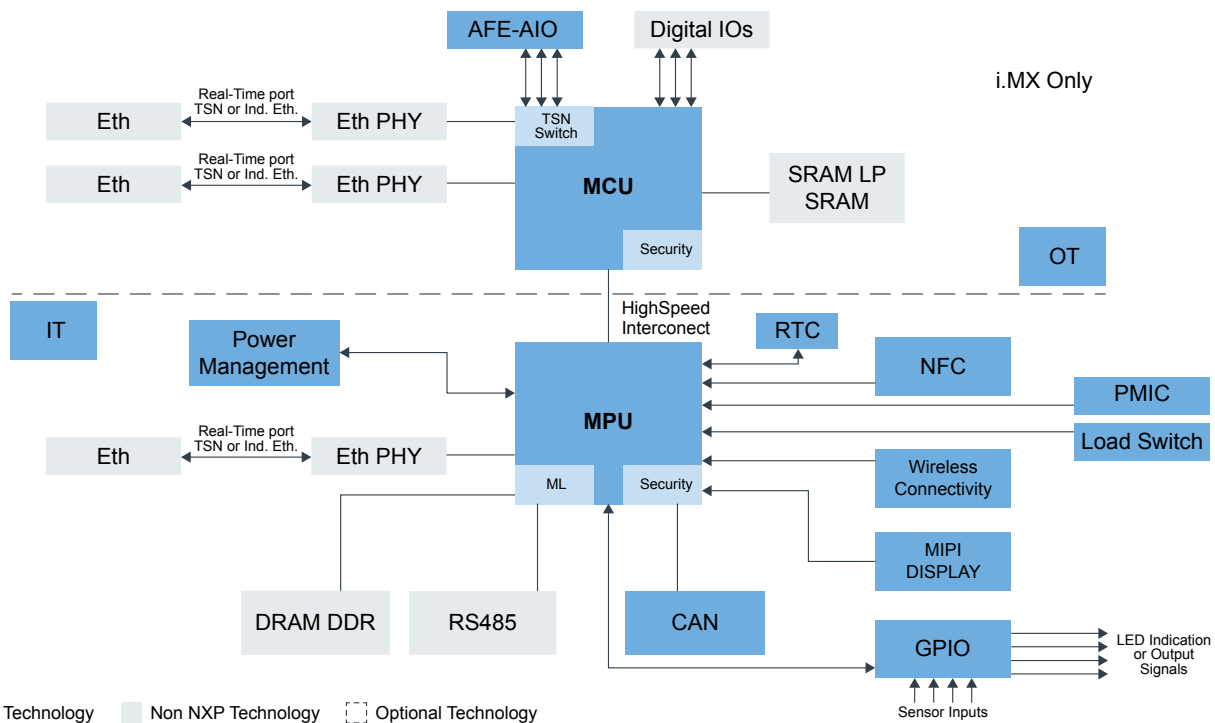

Recommended Products for HMI High Tier

MPU

- **IMX8MPLUS**: i.MX 8M Plus – Arm® Cortex®-A53, Machine Learning, Vision, Multimedia and Industrial IoT
- **Layerscape Processors**: Layerscape® Processors
- **LX2160A**: Layerscape® LX2160A, LX2120A, LX2080A Processors
- **LX2162A**: Layerscape® LX2162A, LX2122A, LX2082A Processors


MCU

- **MCX-A13X-A14X-A15X**: MCX A13x, 14x, 15x MCUs with Arm® Cortex® M33, Scalable Device Options, Low Power and Intelligent Peripherals
- **MCX-N94X-N54X**: MCX N94x/54x Highly Integrated Multicore MCUs with On-Chip Accelerators, Intelligent Peripherals and Advanced Security
- **i.MX-RT1170**: i.MX RT1170: 1 GHz Crossover MCU with Arm® Cortex® Cores

[illegible]

Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • MCX-A13X-A14X-A15X: MCX A13x, 14x, 15x MCUs with Arm® Cortex® M33, Scalable Device Options, Low Power and Intelligent Peripherals • MCX-N94X-N54X: MCX N94x/54x Highly Integrated Multicore MCUs with On-Chip Accelerators, Intelligent Peripherals and Advanced Security • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
AFE-AIO	

HMI Entry Tier Block Diagram

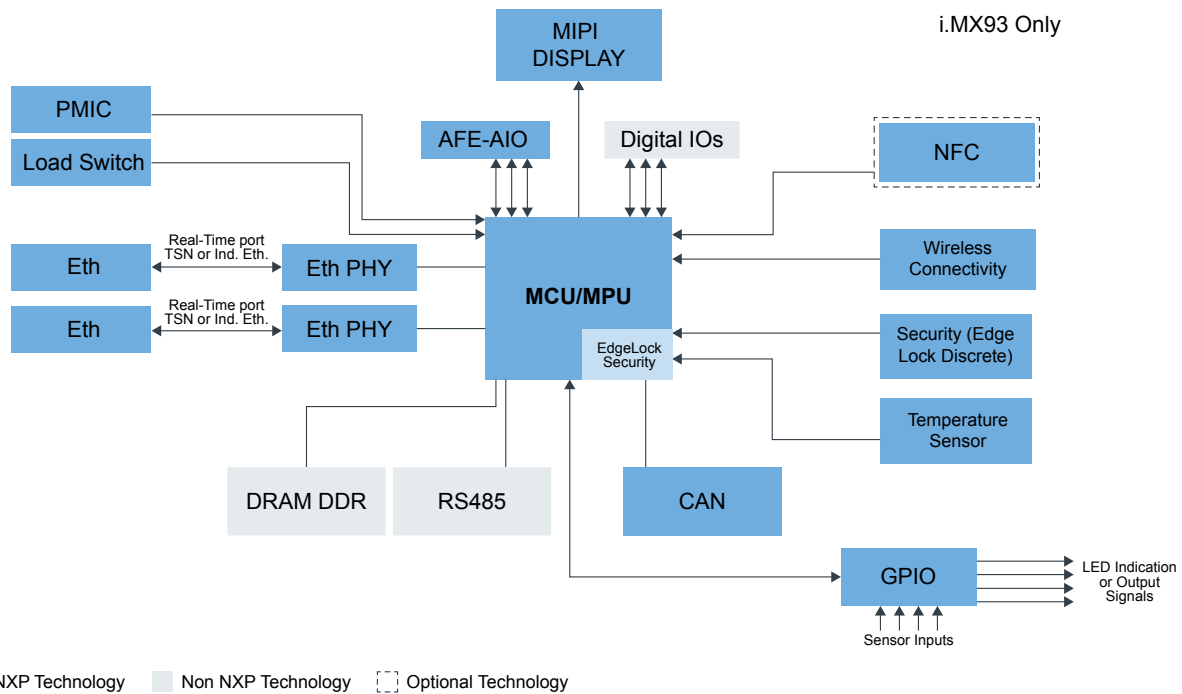

Recommended Products for HMI Entry Tier

MPU

- [MCX-A13X-A14X-A15X](#): MCX A13x, 14x, 15x MCUs with Arm® Cortex® M33, Scalable Device Options, Low Power and Intelligent Peripherals
- [MCX-N94X-N54X](#): MCX N94x/54x Highly Integrated Multicore MCUs with On-Chip Accelerators, Intelligent Peripherals and Advanced Security
- [i.MX-RT1050](#): i.MX RT1050 Crossover MCU with Arm® Cortex®-M7 Core
- [i.MX-RT1060](#): i.MX RT1060: Crossover MCU with Arm® Cortex®-M7
- [i.MX-RT1170](#): i.MX RT1170: 1 GHz Crossover MCU with Arm® Cortex® Cores
- [i.MX8MMINI](#): i.MX 8M Mini - Arm® Cortex®-A53, Cortex-M4, Audio, Voice, Video
- [i.MX93](#): i.MX 93 Applications Processor Family – Arm® Cortex®-A55, ML Acceleration, Power Efficient MPU

Temperature Sensor

- [P3T1035xUK](#): I3C, I²C-Bus, ±0.5 °C Accuracy, Digital Temperature Sensor
- [P3T2030xUK](#): I3C, I²C-Bus, 2.0 °C Accuracy, Digital Temperature Sensor

[illegible]

Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • MCX-A13X-A14X-A15X: MCX A13x, 14x, 15x MCUs with Arm® Cortex® M33, Scalable Device Options, Low Power and Intelligent Peripherals • MCX-N94X-N54X: MCX N94x/54x Highly Integrated Multicore MCUs with On-Chip Accelerators, Intelligent Peripherals and Advanced Security • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
AFE-AIO	

View our complete solution for [Industrial HMI](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2025 NXP B.V.