



K32W061/41: High-Performance, Secure and Ultra-Low-Power MCU for Zigbee[®], Thread[™], and Bluetooth[®] LE 5.0 with Built-In NFC Option

K32W061_41


Last Updated: Apr 11, 2024

The K32W061/41 portfolio is designed to power the next generation of ultra-low-current multiprotocol wireless IoT devices with support for IEEE 802.15.4 mesh network protocols Zigbee[®] and Thread[™] as well as Bluetooth[®] Low Energy 5.0. This portfolio also supports Matter, the unified IP-based application layer to work across ecosystems being developed by the Connectivity Standards Alliance, targeted for release by end of 2021.

These wireless MCUs include multiple low-power modes and ultra-low radio Tx and Rx power consumption which enables IoT products powered by K32W061/41 to have extended battery life. With high Rx sensitivity and configurable Tx output power, the K32W061/41 MCUs offer reliable and robust connectivity performance.

The K32W061/41 portfolio is powered by an Arm[®] Cortex[®]-M4 MCU and with 640 KB on-board flash and 152 KB SRAM, has enough room and flexibility for complex applications and over-the-air (OTA) upgrade capability without external memory. These devices also include a rich set of MCU digital and analog peripherals and multiple serial communication interfaces for embedded connected applications and a quad serial flash memory controller, SPIFI, that can be used to extend non-volatile memory.

K32W061/41 Block Diagram Block Diagram

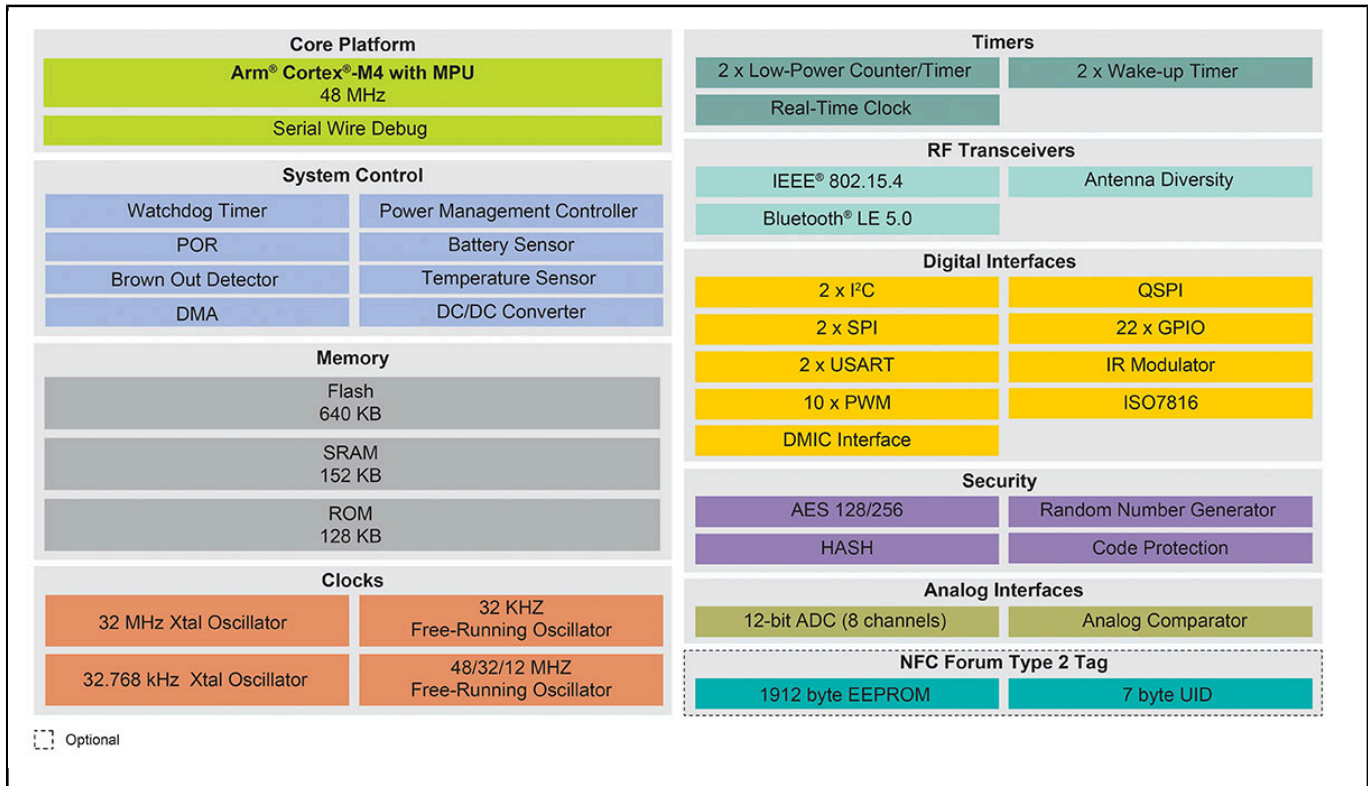

View additional information for [K32W061/41: High-Performance, Secure and Ultra-Low-Power MCU for Zigbee®, Thread™, and Bluetooth® LE 5.0 with Built-In NFC Option.](#)

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.