



# DSI2.5 $\pm 25g$ to $\pm 375g$ X-Axis, Medium- or High-g, Digital Inertial Sensor

## MMA26xx

### Not Recommended for New Designs


This page contains information on a product that is not recommended for new designs.

Last Updated: Dec 12, 2024

The MMA26xxW and MMA26xxNWR2 inertial satellite sensors support the DSI communication protocol for front and side crash detection in automotive applications.

- Offers the only supplier with an x-axis over-damped inertial satellite sensor housed in a QFN package
- Enables a smaller footprint and more flexibility for module orientation in vehicles
- Provides [SafeAssure](#) functional safety

## MMA16xx Acceleration Sensor Block Diagram Block Diagram

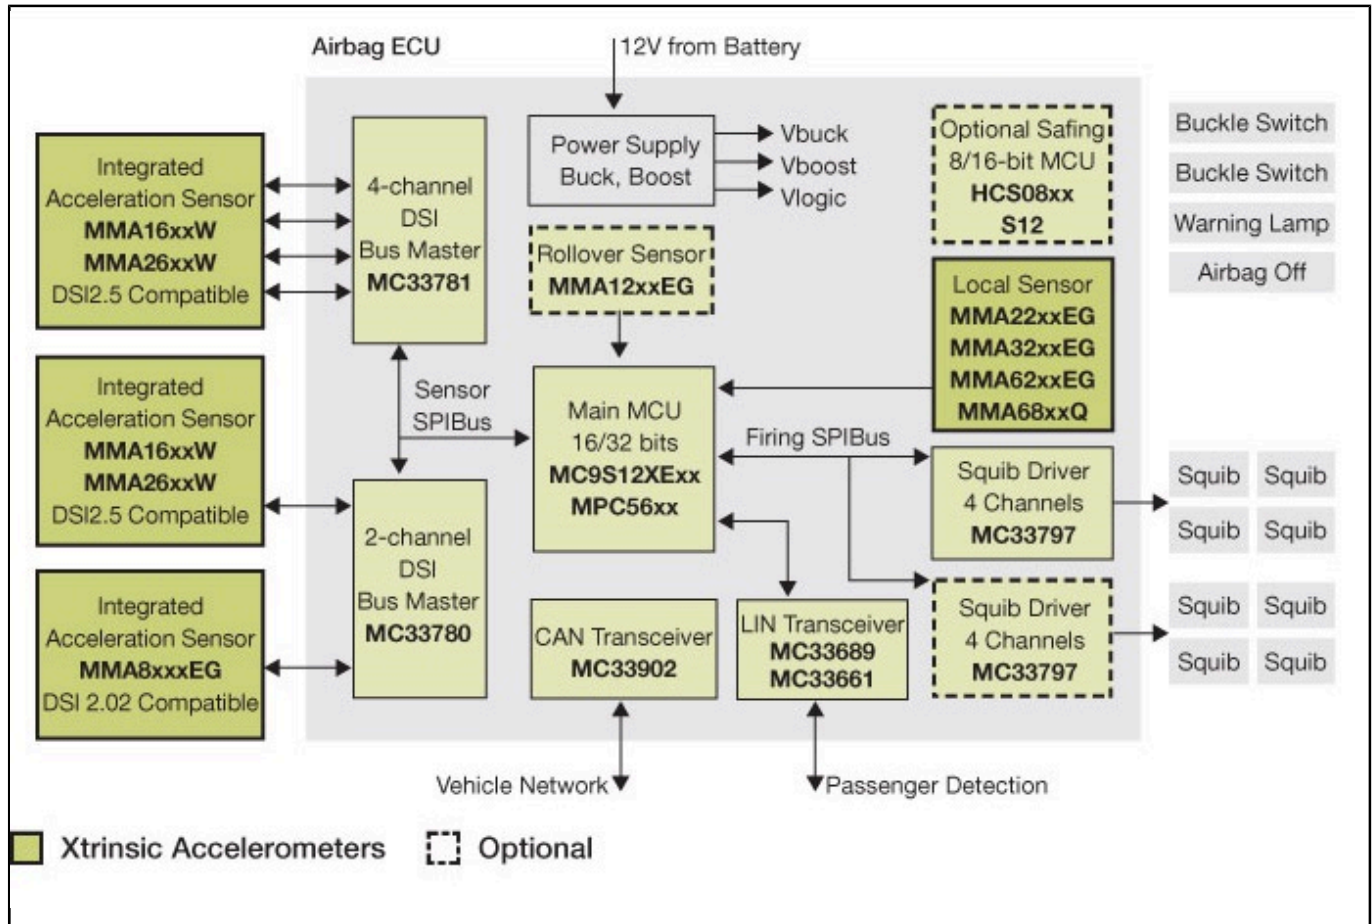

View additional information for [DSI2.5  \$\pm 25g\$  to  \$\pm 375g\$  X-Axis, Medium- or High-g, Digital Inertial Sensor](#).

**Note:** The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2025 NXP B.V.