



# $\pm 2g/\pm 4g/\pm 8g$ , Low g, 12-Bit Digital Accelerometer

## MMA8452Q

### Archived

This page contains information on a product that is no longer manufactured (discontinued). Specifications and information herein are available for historical reference only.


Last Updated: Feb 24, 2025

This product is in “End of Life” status, we recommend [FXLS8971CF](#) or [FXLS8974CF](#) as a replacement. In cases where MMA845xQ is absolutely required, customers may reach out to Rochester electronics to check available stock.

The NXP MMA8452Q is a low-power, three-axis capacitive micromachined accelerometer with 12 bits of resolution, featuring:

- Embedded functions with flexible user-programmable options, configurable to two interrupt pins
- Embedded interrupt functions for overall power savings relieving the host processor from continuously polling data
- User-selectable full scales of  $\pm 2g/\pm 4g/\pm 8g$  with high-pass filtered data as well as non-filtered data available real-time
- Inertial wake-up interrupt signals from any combination of the configurable embedded functions allowing the MMA8452Q to monitor events and remain in a low-power mode during periods of inactivity

## MMA8452Q Acceleration Sensor Block Diagram Block Diagram

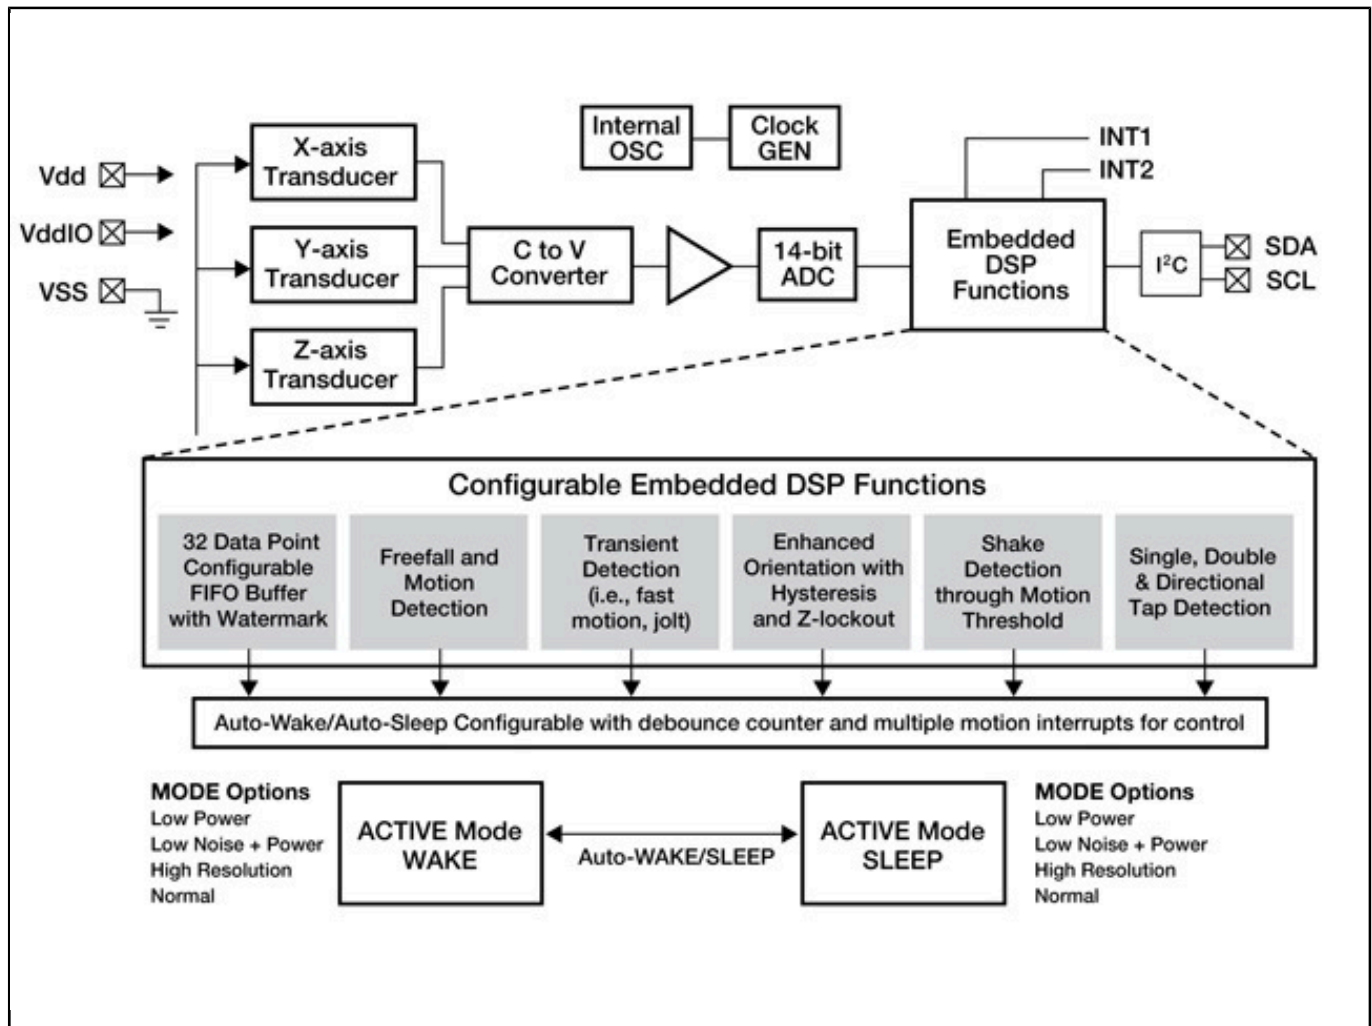

View additional information for [±2g/±4g/±8g, Low g, 12-Bit Digital Accelerometer](#).

**Note:** The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2025 NXP B.V.