



# Multi-Channel (5) PMIC for Automotive Applications: 3 LVBUCK and 2 LDO, Fit for ASIL B Safety Level

## PF5113

### Preproduction

This page contains information on a preproduction product. Specifications and information herein are subject to change without notice. For additional information [contact support](#) or your sales representative.

Last Updated: Dec 17, 2024


The PF5113 is NXP's multi-channel PMIC device designed to be used for automotive ADAS radar application and industrial application.

Integrated voltage monitoring circuits ensure compliance with ISO 26262 standard and functional safety ASIL B level. The PF5113 is also available as a standard nonsafety device for applications that don't require the ISO26262 compliance.

The PF5113 is suitable for NXP radar system solution including S32R41 and TEF82xx.

## Multi-Channel (5) PMIC for Automotive Applications: 3 LVBUCK and 2 LDO, Fit for ASIL B Safety Level Block Diagram

### PF5113

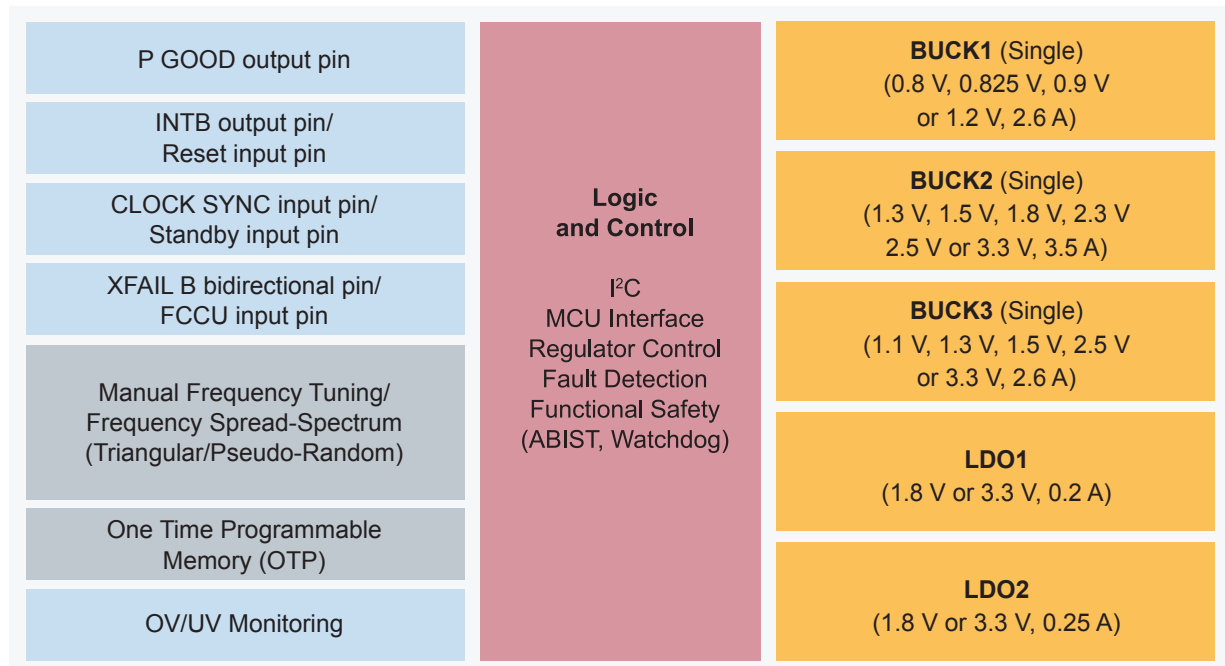

View additional information for [Multi-Channel \(5\) PMIC for Automotive Applications: 3 LVBUCK and 2 LDO, Fit for ASIL B Safety Level](#).

**Note:** The information on this document is subject to change without notice.

**[www.nxp.com](http://www.nxp.com)**

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2025 NXP B.V.