


## **Automotive Radar Solutions**

Last Updated: Apr 25, 2025

Radar sensors play an essential role for automotive ADAS to enhance road safety and increase driver convenience. NXP provides a scalable portfolio of highly integrated, safe and secure product families of MMICs, processors and SoCs, addressing increasing safety requirements and enabling autonomous driving levels 2+ and beyond.


System designers require a portfolio with a scalable, streamlined and highly-integrated processing platform that strikes the optimal balance of compute agility and power efficiency for the next-generation of radar sensor solutions. NXP's offering consists of fully integrated 77 GHz RFCMOS transceivers, high-performance processors and small form factor one-chip SoCs to enable the full application spectrum for different types of automotive radar sensors from corner to long-range up to 4D imaging radar. Combined with NXP's comprehensive solutions of PMIC, CAN, Ethernet and FlexRay products, NXP eases time of development for engineers when developing scalable solutions to meet the next generation safety requirements and applications.

4D Imaging Radar Block Diagram

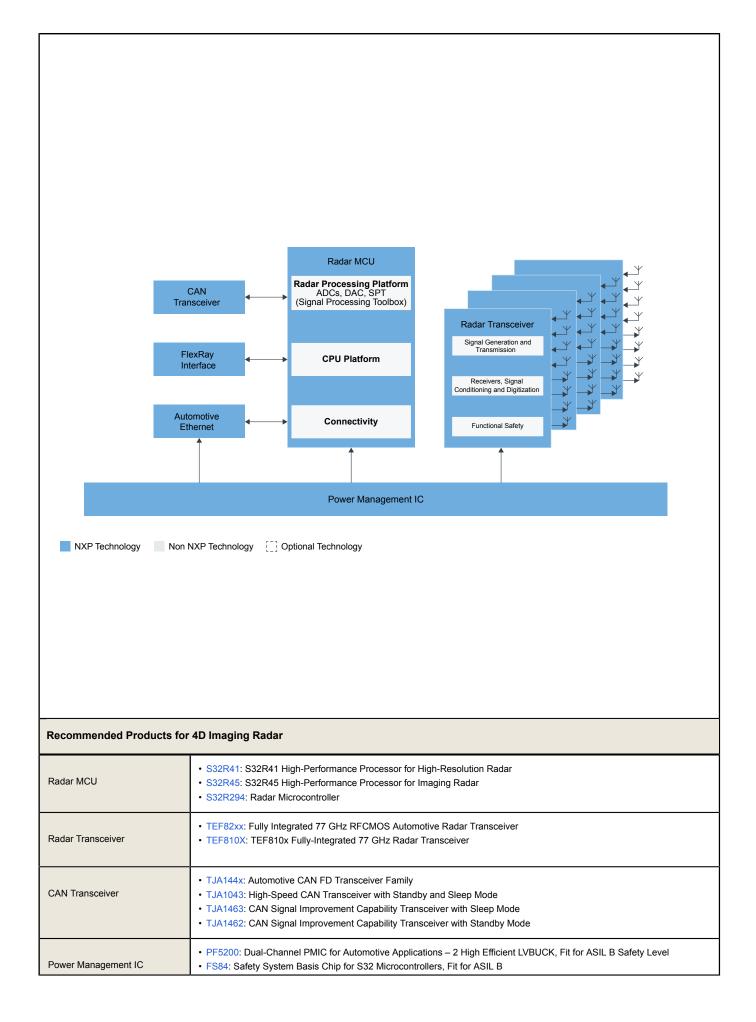

	PF5024: Multi-Channel (4) PMIC for Automotive Applications – 4 High Power, Fit for ASIL B Safety Level
FlexRay Interface	• TJA1081G: FlexRay <sup>™</sup> Node Transceiver - Clamp 30
Automotive Ethernet	<ul> <li>TJA1121: TJA1121, MACsec Enabled ASIL B Compliant Automotive Ethernet 1000BASE-T1 PHY Transceiver</li> <li>TJA1120: TJA1120, ASIL B Compliant Automotive Ethernet 1000BASE-T1 PHY Transceiver</li> <li>SJA1110: Multi-Gig Safe and Secure TSN Ethernet Switch with Integrated 100BASE-T1 PHYs</li> <li>SJA1105PQRS: SJA1105PEL/QEL/REL/SEL Series Ethernet Switches</li> <li>TJA1104: TJA1104, MACsec Enabled ASIL B Compliant Automotive Ethernet 100BASE-T1 PHY Transceiver</li> <li>TJA1103: TJA1103, ASIL B Compliant Automotive Ethernet 100BASE-T1 PHY Transceiver</li> <li>TJA1101: TJA1101B, IEEE 100BASE-T1 Compliant Automotive Ethernet PHY Transceiver</li> </ul>
Radar One-Chip	SAF85XX: High Performance 77GHz RFCMOS Automotive Radar One-Chip SoC

## Radar SoC Block Diagram

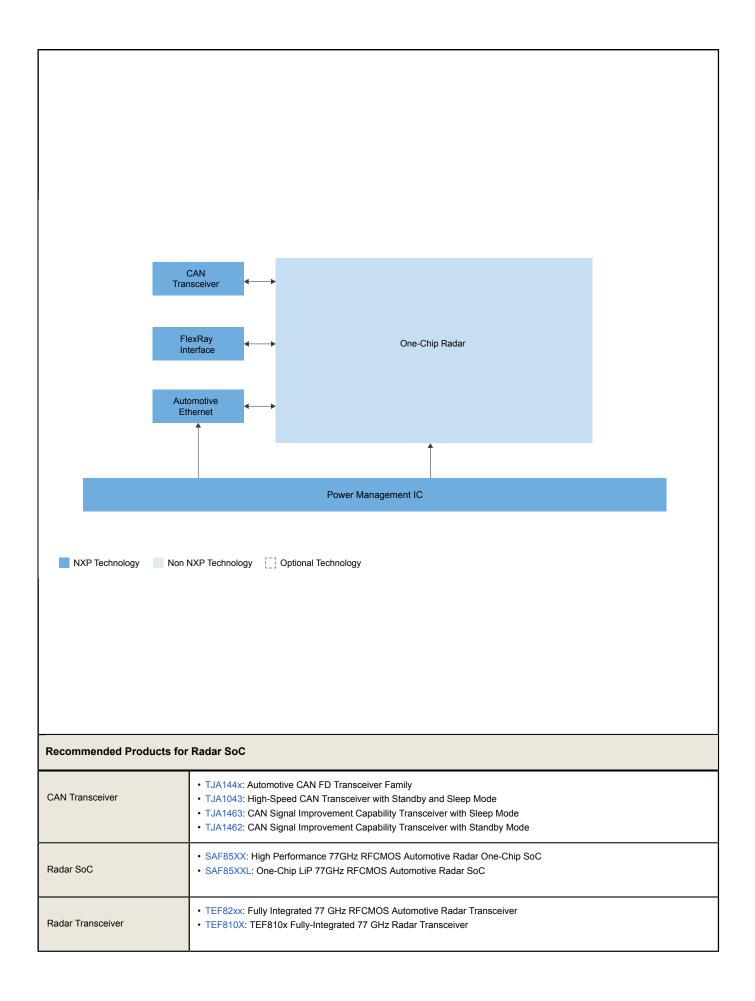

FlexRay Interface	• TJA1081G: FlexRay <sup>™</sup> Node Transceiver - Clamp 30
Automotive Ethernet	<ul> <li>TJA1121: TJA1121, MACsec Enabled ASIL B Compliant Automotive Ethernet 1000BASE-T1 PHY Transceiver</li> <li>TJA1120: TJA1120, ASIL B Compliant Automotive Ethernet 1000BASE-T1 PHY Transceiver</li> <li>SJA1110: Multi-Gig Safe and Secure TSN Ethernet Switch with Integrated 100BASE-T1 PHYs</li> <li>SJA1105PQRS: SJA1105PEL/QEL/REL/SEL Series Ethernet Switches</li> <li>TJA1104: TJA1104, MACsec Enabled ASIL B Compliant Automotive Ethernet 100BASE-T1 PHY Transceiver</li> <li>TJA1103: TJA1103, ASIL B Compliant Automotive Ethernet 100BASE-T1 PHY Transceiver</li> <li>TJA1101: TJA1101B, IEEE 100BASE-T1 Compliant Automotive Ethernet PHY Transceiver</li> </ul>
Power Management IC	<ul> <li>PF5200: Dual-Channel PMIC for Automotive Applications – 2 High Efficient LVBUCK, Fit for ASIL B Safety Level</li> <li>FS84: Safety System Basis Chip for S32 Microcontrollers, Fit for ASIL B</li> <li>PF5024: Multi-Channel (4) PMIC for Automotive Applications – 4 High Power, Fit for ASIL B Safety Level</li> </ul>

## View our complete solution for Automotive Radar Solutions.

Note: The information on this document is subject to change without notice.

## www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2025 NXP B.V.