



i.MX RT1024: Crossover MCU with Arm® Cortex®-M7

i.MX-RT1024


Last Updated: Apr 28, 2025

i.MX RT1024 Crossover MCUs are based on the Arm® Cortex®-M7 core for real-time microcontroller (MCU) performance and high integration for industrial and IoT applications.

The i.MX RT1024 Arm® Cortex®-M7 operates at up to 500 MHz with 4 MB on-chip flash and 256 KB on-chip RAM that can be configured as Tightly-Coupled Memory or general purpose. The family offers various memory interfaces and a wide range of connectivity interfaces including UART, SPI, I²C, USB and CAN. 144 LQFP packages for low-cost PCB designs.

The i.MX RT1024 family is supported by the [MCUXpresso ecosystem](#), which includes an SDK, a choice of IDEs and secure provisioning and configuration tools to enable rapid development.

i.MX RT1024 Crossover MCU Block Diagram

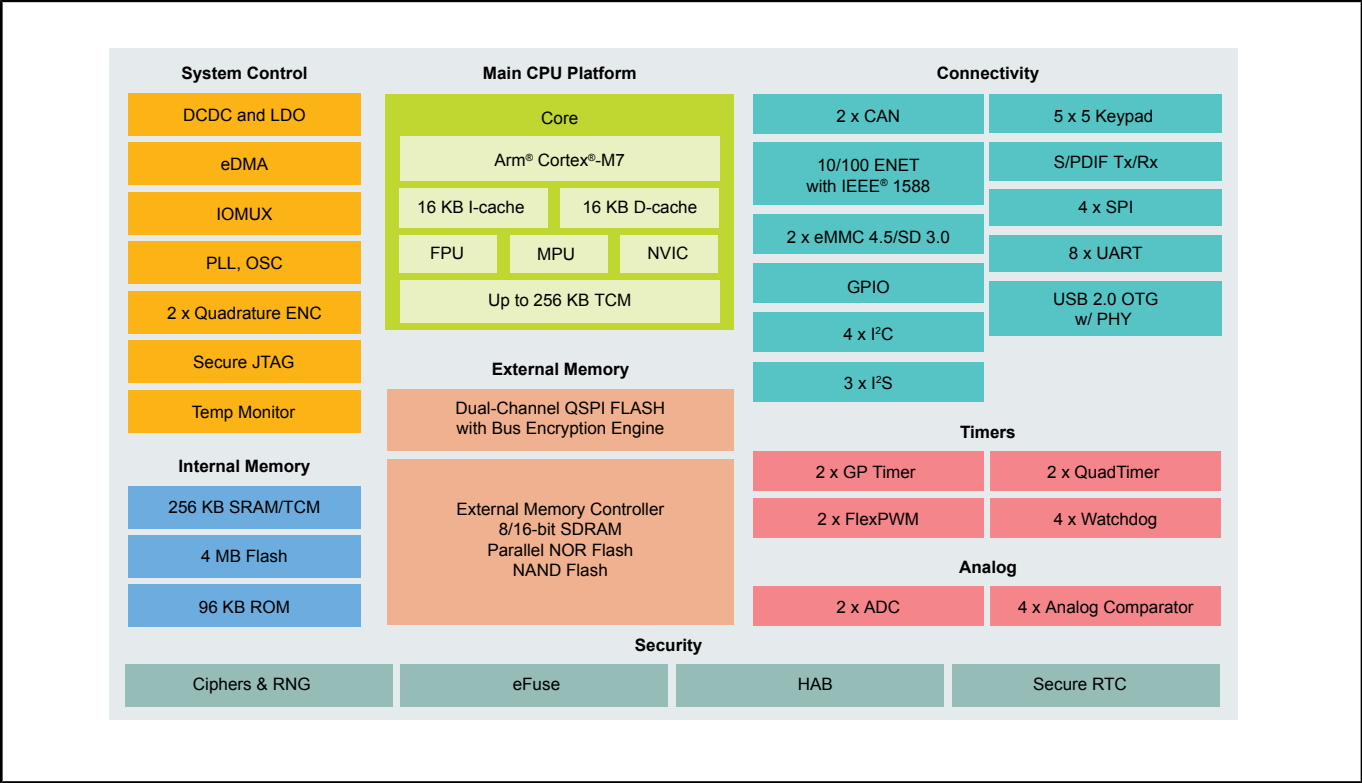

View additional information for [i.MX RT1024: Crossover MCU with Arm® Cortex®-M7](#).

Note: The information on this document is subject to change without notice.