




Anomaly Detection

Last Updated: Feb 7, 2022

Anomaly detection is synonym of machine condition monitoring. Early detection of anomalies allows preventive maintenance and avoids production losses. Ideally, an Industry 4.0 factory will be built from scratch with new production machinery and capital investments, but in reality this equipment is usually used for decades. A small and lightweight sensing tag based on the NTAG SmartSensor and a MCU with machine learning capabilities provides a way to add sensory and logging capabilities to existing machinery without disturbing or interfering during normal operations.

Anomaly detection Block Diagram

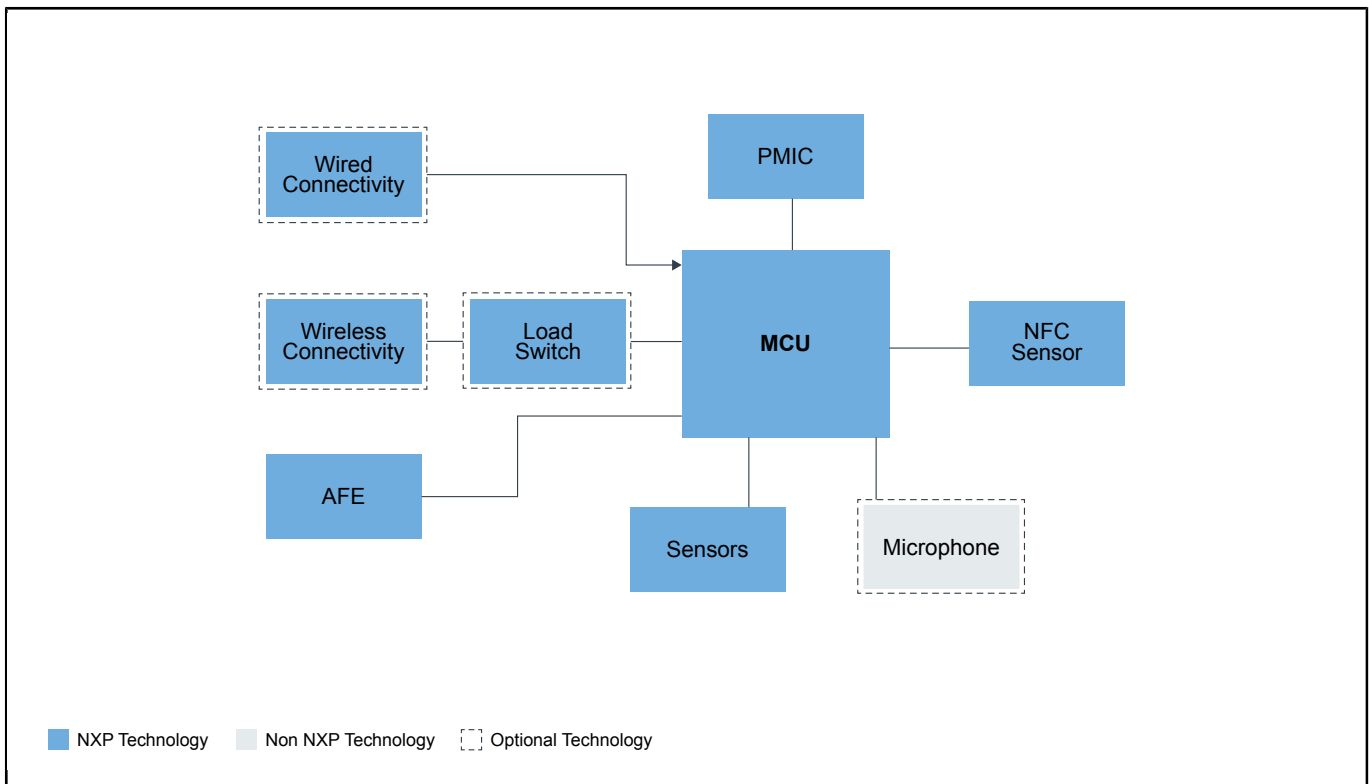

Recommended Products for Anomaly detection

MPU/MCU

* i.MX 8M Family - Arm® Cortex®-A53, Cortex-M4, Audio, Voice, Video

	<ul style="list-style-type: none"> • i.MX RT1050 Crossover MCU with Arm® Cortex®-M7 Core • i.MX RT1060 Crossover MCU with Arm® Cortex®-M7 Core
NFC	<ul style="list-style-type: none"> • NHS3100: NTAG® SmartSensor with Temperature Sensor and Digital IOs
MEMS	<ul style="list-style-type: none"> • MEMS Accelerometer: ±2g/±4g/±8g, Low g, 14-Bit Digital Accelerometer
PMIC	<ul style="list-style-type: none"> • PF4210: 14-Channel Power Management IC Optimized for i.MX 8M
Wi-Fi + Bluetooth	<ul style="list-style-type: none"> • 88W8987: 2.4/5 GHz Dual-Band 1x1 Wi-Fi® 5 (802.11ac) + Bluetooth® 5.2 Solution • 2.4/5 GHz Dual-Band 1x1 Wi-Fi® 4 (802.11n) + Bluetooth® 5.2 Solution

View our complete solution for [Anomaly Detection](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2023 NXP B.V.