



# 18-Channel Li-Ion Battery Cell Controller IC

## BMA7318-BMI7318-BMA7518


**Active**

Last Updated: Jun 3, 2026

The BMA7318, BMI7318, BMA7518 is a Li-ion battery cell controller IC designed specifically for automotive HVBMS, industrial ESS, and 48 V applications. It can monitor up to 18 battery cells and 12 temperatures. The BMA7318, BMI7318, BMA7518 features configurable averaging of cell voltage measurements through digital filtering, onboard balancing up to 300 mA, and integrated current measurement, this device supports ISO 26262, up to ASIL C safety capability and high integrity safety levels up to industrial SIL 2.

The BMA7318, BMI7318, BMA7518 also includes an integrated communication bridge (SPI2TPL) with robust isolated 2.0 Mbit/s communication. The BMA7318, BMI7318, BMA7518 is designed to provide up to 25 years of ESS application lifetime with an extended mission profile (EMP) and shares a product family approach with PIN2PIN compatibility between the BMA7318, BMI7318, BMA7518 devices.

# BMA7318-BMI7318-BMA7518 Block Diagram

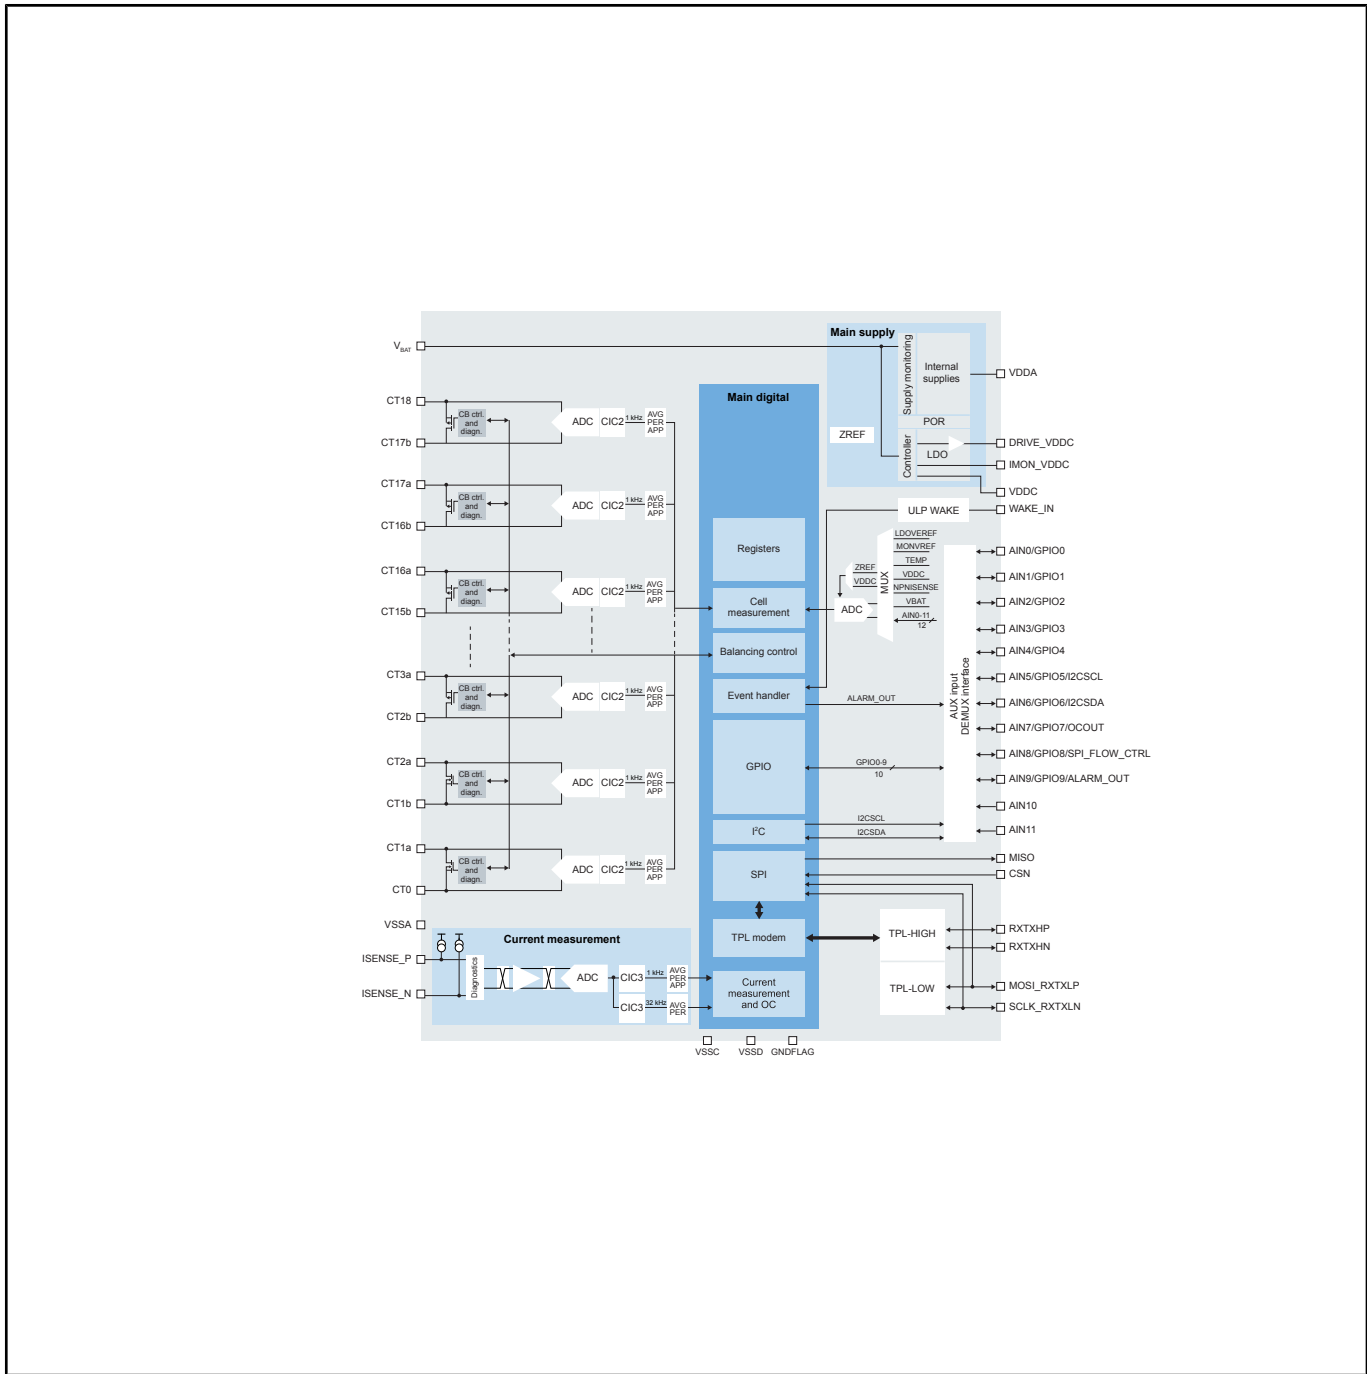

View additional information for [18-Channel Li-Ion Battery Cell Controller IC](#).

**Note:** The information on this document is subject to change without notice.

**[www.nxp.com](http://www.nxp.com)**

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2026 NXP B.V.