



# 24 and 26-Channel Li-Ion Battery Cell Controller IC ASIL D with EIS

**BMA742X** NEW


## Preproduction

This page contains information on a preproduction product. Specifications and information herein are subject to change without notice. For additional information please contact your sales representative.


Last Updated: May 26, 2026

The BMA7424 and BMA7426 are automotive lithium-ion battery cell controllers (BCCs) integrated circuits (ICs) supporting 24 and 26 cells, respectively. They feature high-accuracy, highly synchronized analog-to-digital controllers (ADCs) on each voltage channel and integrate a discrete fourier transform (DFT) engine for electrochemical impedance spectroscopy (EIS). They offer pin compatibility and a shared software platform with non-EIS variants enabling a cost-effective EIS implementation. They consume only 4 mA (typ.) and support ASIL D functional safety.

# BMA7424 Block Diagram

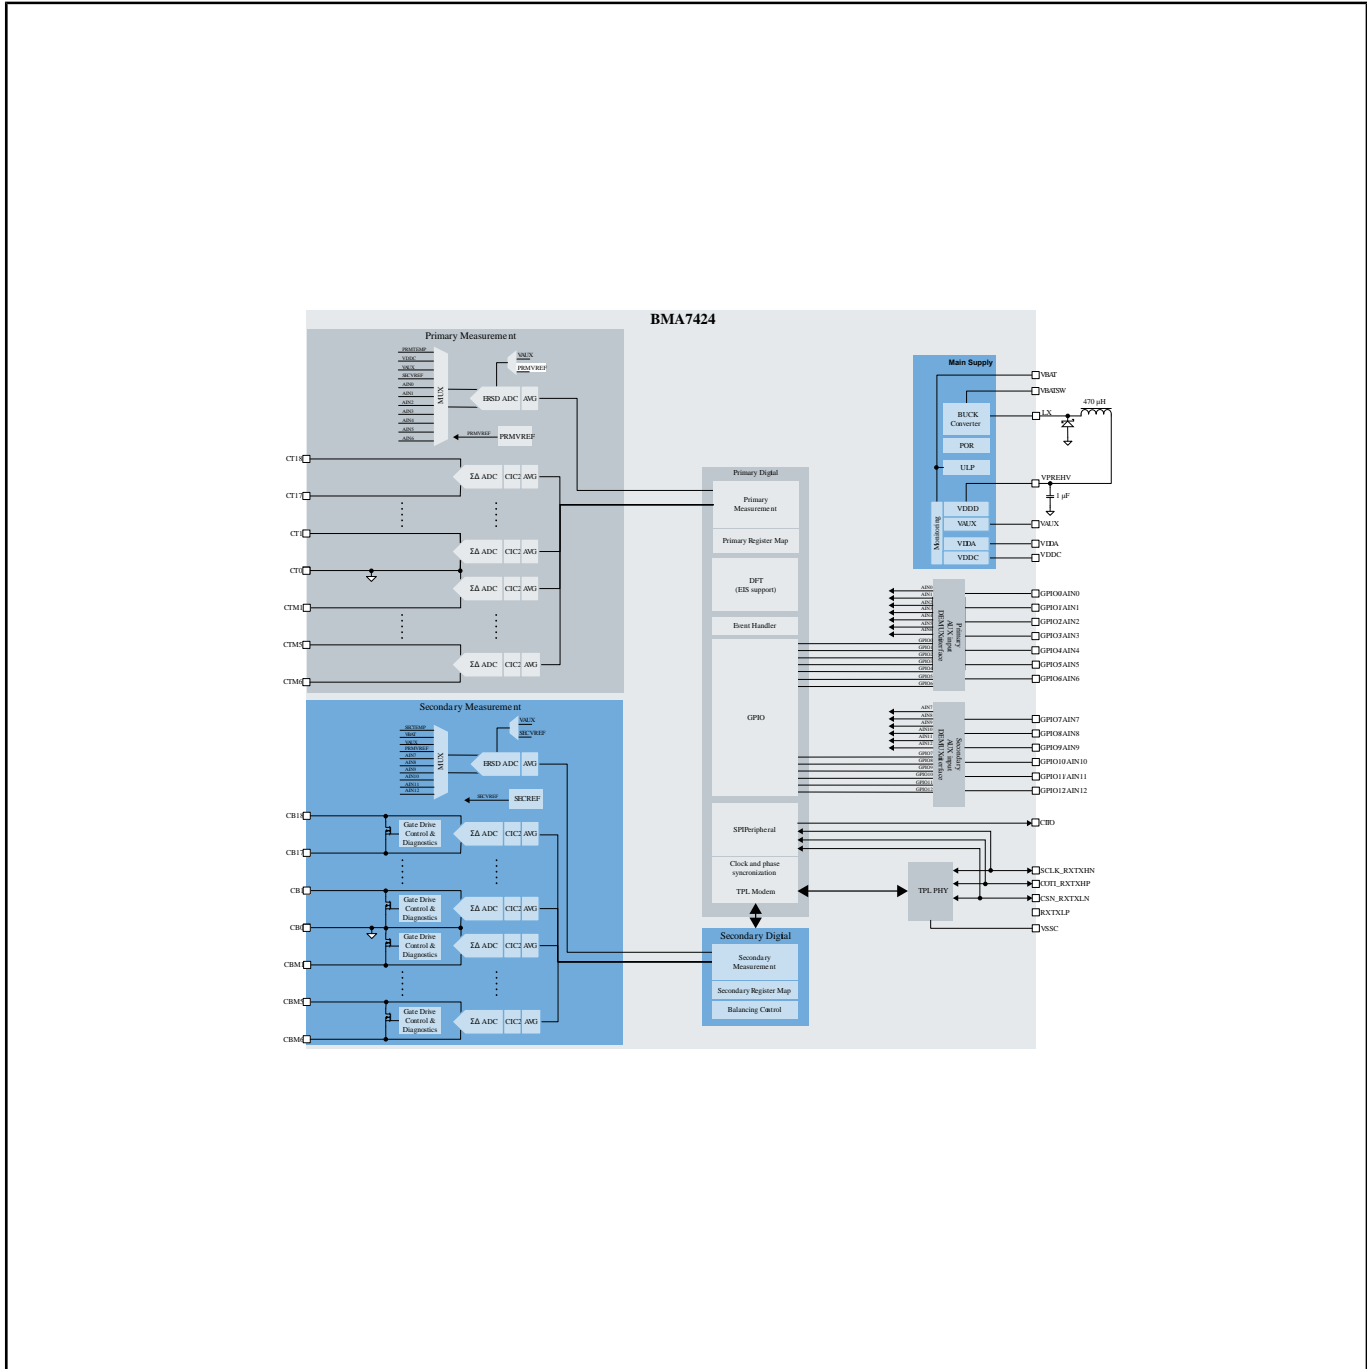

# BMA7426 Block Diagram

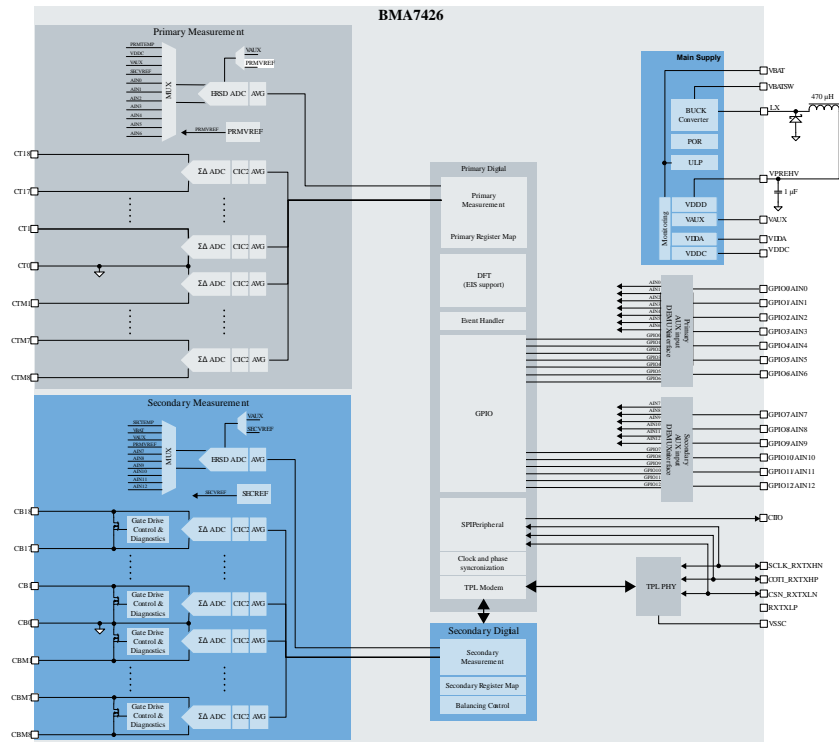

View additional information for [24 and 26-Channel Li-Ion Battery Cell Controller IC ASIL D with EIS](#).

Note: The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2026 NXP B.V.