



# Pegoda Smart Card Reader Based on PN7642


## CLRD730

Last Updated: Dec 23, 2025

The Pegoda CLRD730 reader is a reference design and evaluation reader based on [PN7642 NFC controller](#) with a powerful Arm® Cortex®-M33 microcontroller (MCU). By default, the reader is delivered in personal computer/smart card (PS/SC) mode and can be switched by use of the mode button to Virtual COM (VCOM) on USB-C 1 port. Drivers are installed to identify the reader as contactless as well as contact reader by support of Windows, macOS and Linux. The USB-C 2 power port can be used for an additional external power supply.

The reader is built around proven, well-established MIFARE®, NTAG® and ICODE® products compatible with NXP tools like RFIDDiscover, Card Test Framework and NFC Cockpit.

# Pegoda CLRD730 Block Diagram

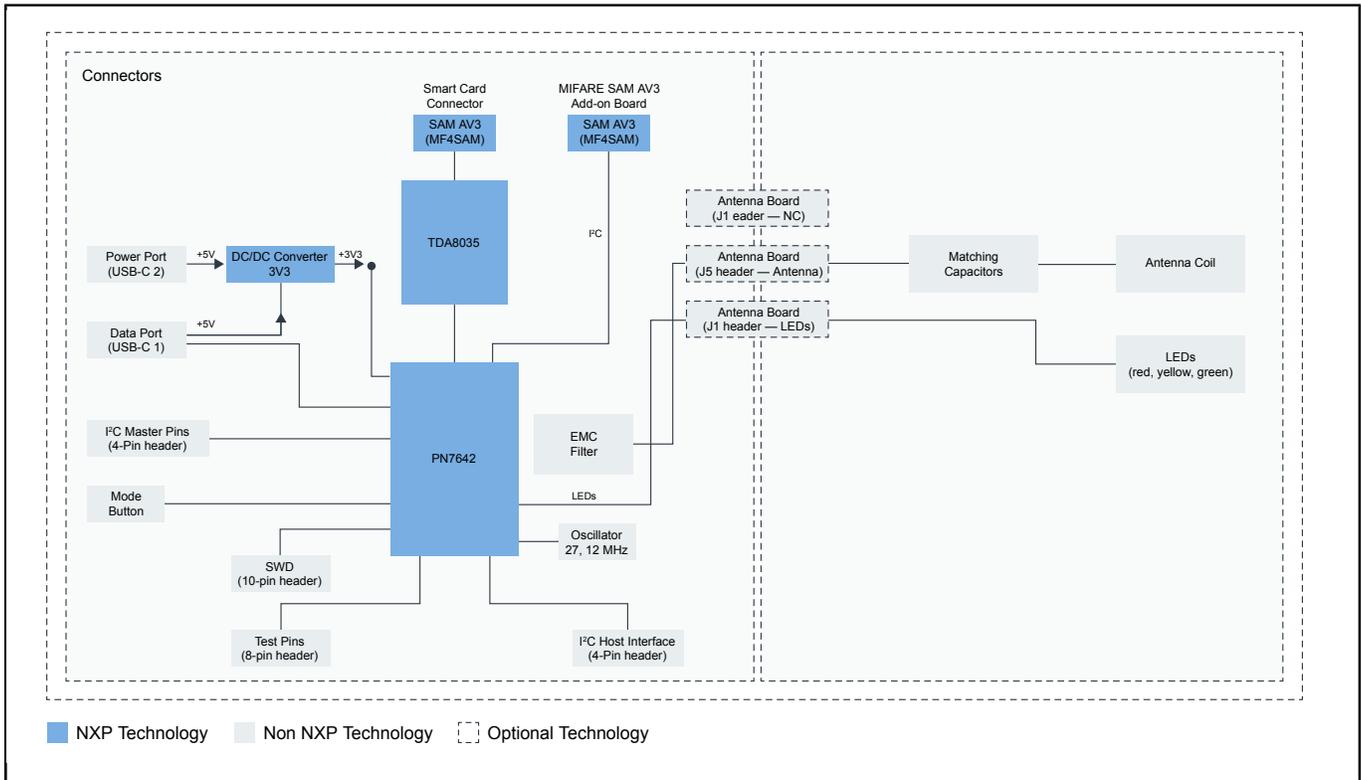

View additional information for [Pegoda Smart Card Reader Based on PN7642](#).

**Note:** The information on this document is subject to change without notice.

**www.nxp.com**

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2025 NXP B.V.