. . eescale Semiconductor

Document Number: MHL21336N Rev. 8, 12/2006

Replaced by MHL21336NN. There are no form, fit or function changes with this part replacement.

3G Band RF Linear LDMOS Amplifier

Designed for ultra-linear amplifier applications in 50 ohm systems operating in the 3G frequency band. A silicon FET Class A design provides outstanding linearity and gain. In addition, the excellent group delay and phase linearity characteristics are ideal for digital CDMA modulation systems.

- Third Order Intercept: 45 dBm Typ
- Power Gain: 31 dB Typ (@ f = 2140 MHz)
- Input VSWR ≤ 1.5:1


Features

ARCHIVE INFORMA

- Excellent Phase Linearity and Group Delay Characteristics
- Ideal for Feedforward Base Station Applications
- N Suffix Indicates Lead Free Terminations



2110-2170 MHz 3.0 W, 31 dB RF LINEAR LDMOS AMPLIFIER



CASE 301AP-02, STYLE 1

Table 1. Absolute Maximum Ratings (T_C = 25°C unless otherwise noted)

Rating	Symbol	Value	Unit
DC Supply Voltage	V _{DD}	30	Vdc
RF Input Power	P _{in}	+5	dBm
Storage Temperature Range	T _{stg}	- 40 to +100	°C
Operating Case Temperature Range	T _C	- 20 to +100	°C


Table 2. Electrical Characteristics (V_{DD} = 26 Vdc, T_C = 25°C; 50 Ω System)

Characteristic		Symbol	Min	Тур	Max	Unit
Supply Current		I _{DD}	—	500	525	mA
Power Gain	(f = 2140 MHz)	Gp	30	31	33	dB
Gain Flatness	(f = 2110 - 2170 MHz)	G _F	—	0.15	0.4	dB
Power Output @ 1 dB Compression	(f = 2140 MHz)	P1dB	34	35	—	dBm
Third Order Intercept (f1 = 2137 MHz, f2 = 2142 MHz)		ITO	44	45	—	dBm
Noise Figure	(f = 2170 MHz)	NF	_	4.5	5	dB

NOTE - **CAUTION** - MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.




TYPICAL CHARACTERISTICS

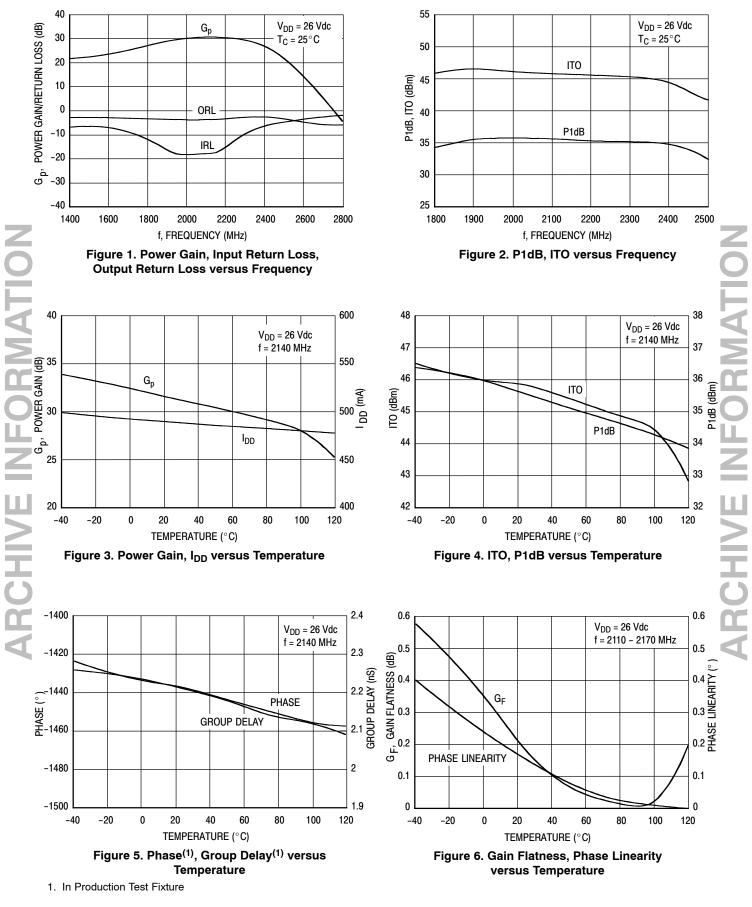

MHL21336N




TYPICAL CHARACTERISTICS

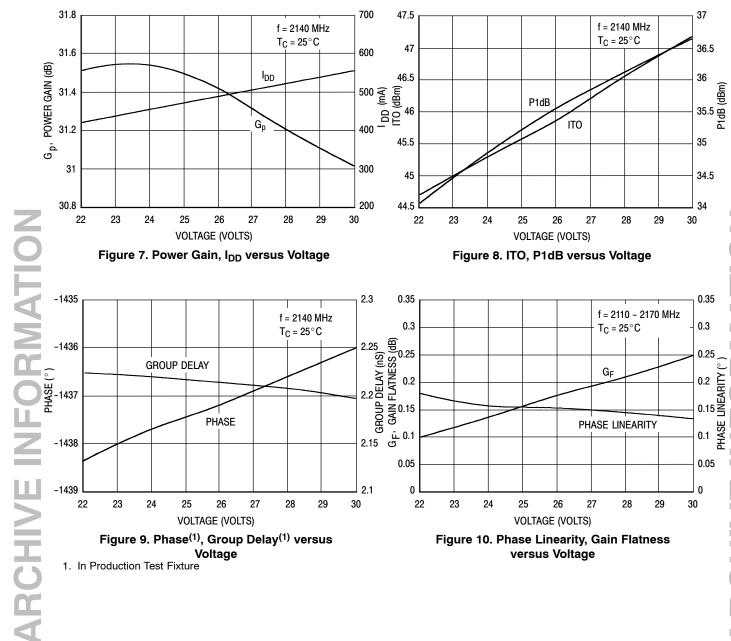



PACKAGE DIMENSIONS

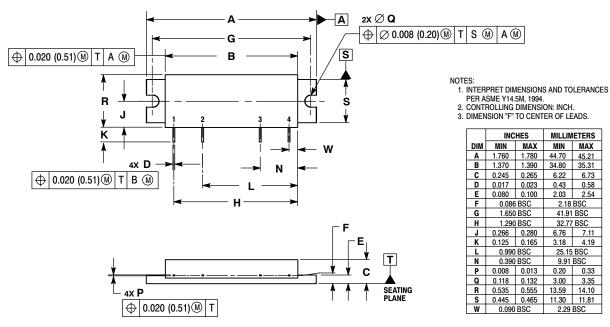

3. DIMENSION "F" TO CENTER OF LEADS. INCHES MILLIMETERS MIN MAX MIN MAX 1.780 44.70 45.21 34.80 35.31 1.370 1.390 0.245 0.265 6.22 6.73
 0.245
 0.203

 0.017
 0.023

 0.080
 0.100
 0.43 0.58 2.03 2.54 0.086 BSC 1.650 BSC 2.18 BSC 41.91 BSC 1.290 BSC 32.77 BSC
 J
 0.266
 0.280

 K
 0.125
 0.165

 L
 0.990 BSC
 6.76 7.11 3.18 4.19 25.15 BSC 9.91 BSC 0.20 0.3

IN	0.390 830		9.91 030		
Р	0.008	0.013	0.20	0.33	
Q	0.118	0.132	3.00	3.35	
R	0.535	0.555	13.59	14.10	
S	0.445	0.465	11.30	11.81	
W	0.090 BSC		2.29 BSC		
STYL Pl	E 1: N 1. RF II 2 VD				

ARCHIVE INFORMATION

 2. VDD1
3. VDD2
4. RF OUTPUT CASE: GROUND

CASE 301AP-02 **ISSUE E**

MHL21336N

4



REVISION HISTORY

The following table summarizes revisions to this document.

Revision	Date	Description
8	Dec. 2006	Added replacement part information, p. 1



How to Reach Us:

Home Page: www.freescale.com

Web Support: http://www.freescale.com/support

USA/Europe or Locations Not Listed:

Freescale Semiconductor, Inc. Technical Information Center, EL516 2100 East Elliot Road Tempe, Arizona 85284 +1-800-521-6274 or +1-480-768-2130 www.freescale.com/support

Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH Technical Information Center Schatzbogen 7 81829 Muenchen, Germany +44 1296 380 456 (English) +46 8 52200080 (English) +49 89 92103 559 (German) +33 1 69 35 48 48 (French) www.freescale.com/support

Japan:

INFORMATIC

RCHIVE

Freescale Semiconductor Japan Ltd. Headquarters ARCO Tower 15F 1-8-1, Shimo-Meguro, Meguro-ku, Tokyo 153-0064 Japan 0120 191014 or +81 3 5437 9125 support.japan@freescale.com

Asia/Pacific:

Freescale Semiconductor Hong Kong Ltd. Technical Information Center 2 Dai King Street Tai Po Industrial Estate Tai Po, N.T., Hong Kong +800 2666 8080 support.asia@freescale.com

For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center P.O. Box 5405 Denver, Colorado 80217 1-800-441-2447 or 303-675-2140 Fax: 303-675-2150 LDCForFreescaleSemiconductor@hibbertgroup.com Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale [™] and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. © Freescale Semiconductor, Inc. 2006, 2007. All rights reserved.

RoHS-compliant and/or Pb-free versions of Freescale products have the functionality and electrical characteristics of their non-RoHS-compliant and/or non-Pb-free counterparts. For further information, see http://www.freescale.com or contact your Freescale sales representative.

For information on Freescale's Environmental Products program, go to http://www.freescale.com/epp.

