




Intermediate Flight Controller

Last Updated: May 28, 2024

An intermediate flight controller is used for research and commercial systems, professional UAVs, and high-end personal UAVs. NXP's controllers and processors help design flight controllers with custom interfaces such as individual motor tachometers to detect failure or obstructions.

NXP wireless products will also help developers to include RFID and NFC in their systems. NFC can be used for authorizing a pilot to fly in a specific area/airfield or to make quick setting adjustments to the flying characteristics. As well, RFID is increasingly being implemented for inventorying items in indoor and outdoor assets, such as livestock and power-line transformers.

UAV Intermediate Flight Controller Block Diagram

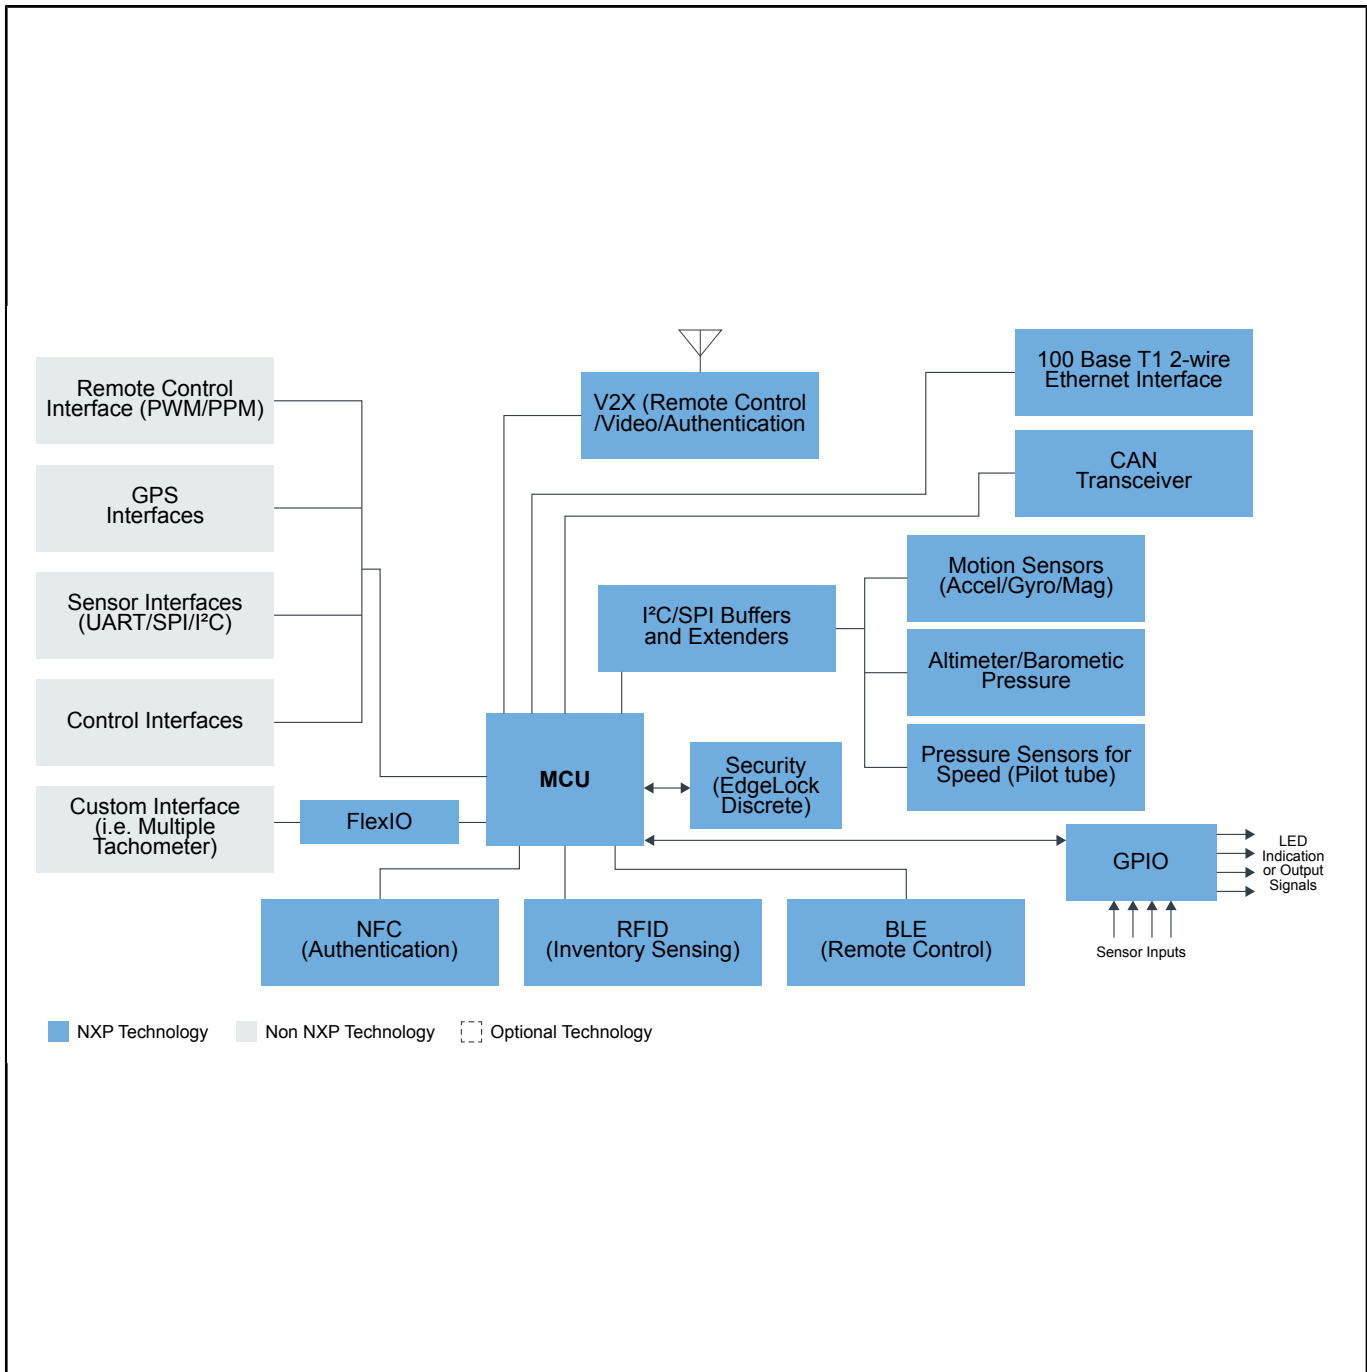

Recommended Products for UAV Intermediate Flight Controller

MCU (Kinetis K Series)	<ul style="list-style-type: none"> • MCX A13x, 14x, 15x MCUs with Arm® Cortex® M33, Scalable Device Options, Low Power and Intelligent Peripherals • MCX-N94X-N54X: MCX N94x/54x Highly Integrated Multicore MCUs with On-Chip Accelerators, Intelligent Peripherals and Advanced Security • K Series Arm Cortex-M4: Kinetis® K Series: High-Performance Microcontrollers (MCUs) Based on Arm® Cortex®-M4 Core • KV5x: Kinetis® KV5x-240 MHz, Motor Control and Power Conversion, Ethernet, MCUs based on Arm® Cortex®-M7 • K64_120: Kinetis® K64-120 MHz, 256 KB SRAM Microcontrollers (MCUs) Based on Arm® Cortex®-M4 Core
MCU (Kinetis K Series)	<ul style="list-style-type: none"> • K Series Arm Cortex-M4: Kinetis® K Series: High-Performance Microcontrollers (MCUs) Based on Arm® Cortex®-M4 Core • KV5x: Kinetis® KV5x-240 MHz, Motor Control and Power Conversion, Ethernet, MCUs based on Arm® Cortex®-M7 • K64_120: Kinetis® K64-120 MHz, 256 KB SRAM Microcontrollers (MCUs) Based on Arm® Cortex®-M4 Core

Sensors	<ul style="list-style-type: none"> • FXLS8974CF: ±2g/±4g/±8g/±16g, Low-Power 12-Bit Digital IoT Accelerometer
NFC	<ul style="list-style-type: none"> • NTAG_I2C: NTAG I²C Plus 2K: NFC Forum Type 2 Tag with I²C Interface
RFID	<ul style="list-style-type: none"> • PN7462: NFC Cortex[®]-M0 All-in-One Microcontroller with Optional Contact Interface for Access Control
I2C/SPI Buffers and Extenders	<ul style="list-style-type: none"> • P82B715: I²C-Bus Extender
CAN Transceiver	<ul style="list-style-type: none"> • TJA1057: High-Speed CAN Transceiver - Mantis Family • TJA1044: High-Speed CAN Transceiver with Standby Mode - Mantis Family • UJA1162ATK: Self-Supplied High-Speed CAN Transceiver with Sleep Mode • UJA1076ATW: High-Speed CAN Core System Basis Chip • CAN with Flexible Data Rate: High Speed CAN with Flexible Data Rate (CAN FD) • CAN Signal Improvement: CAN Signal Improvement Capability (SIC) • Secure CAN Transceivers: Secure TJA115x CAN Transceiver Family
Ethernet Interface	<ul style="list-style-type: none"> • TJA1101: TJA1101B, IEEE 100BASE-T1 Compliant Automotive Ethernet PHY Transceiver
Bluetooth LE	<ul style="list-style-type: none"> • QN9080: QN908x: Ultra-Low-Power Bluetooth Low Energy System on Chip Solution
Pressure Sensors	<ul style="list-style-type: none"> • MPXHZ6116: Absolute, Integrated Pressure Sensor (20 to 115kPa)
Barometric Pressure	<ul style="list-style-type: none"> • MPL3115A2: Absolute Digital Pressure Sensor (20 to 110 kPa) • MPXx6115: Gauge and Absolute Pressure Sensor (-115 to 115 kPa)
V2X	<ul style="list-style-type: none"> • V2X Communications: V2X Communications
Security (EdgeLock Discrete)	<ul style="list-style-type: none"> • SE050: EdgeLock[®] SE050: Plug and Trust Secure Element Family – Enhanced IoT Security with High Flexibility • SE051: EdgeLock[®] SE051: Proven, Easy-to-Use IoT Security Solution with Support for Updatability and Custom Applets
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features

Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features
Air Conditioning GPIO	<ul style="list-style-type: none"> • MCX A13x, 14x, 15x MCUs with Arm® Cortex® M33, Scalable Device Options, Low Power and Intelligent Peripherals • MCX-N94X-N54X: MCX N94x/54x Highly Integrated Multicore MCUs with On-Chip Accelerators, Intelligent Peripherals and Advanced Security • PCAL9714: 14-Bit SPI I/O Expander with Agile I/O Features • PCAL9722: 22-Bit SPI I/O Expander with Agile I/O Features

View our complete solution for [Intermediate Flight Controller](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.