



# Integrated ColdFire® V2 External Memory and Ethernet Microprocessors

## MCF520X

### Not Recommended for New Designs


This page contains information on a product that is not recommended for new designs.

Last Updated: Apr 9, 2022

The MCF520X family of ColdFire® V2 embedded controllers offers low system cost, flexible memory controller supporting a combination of external static random access memory (SRAM), flash memory and a choice of single-data rate (SDR), double-data rate (DDR) or mobile-double-data rate (M-DDR) synchronous dynamic random access memory (SDRAM). The MCF5207 and MCF5208 embedded controllers integrate standard ColdFire communications peripherals, including three universal asynchronous receiver/transmitters (UARTs) for medium-and long-distance connections, an inter-integrated circuit (I<sup>2</sup>C) and queued serial peripheral interface (QSPI) for in-system communication to connected peripherals. In addition, the MCF5208 features a 10/100 fast Ethernet controller. The devices are optimized for low-power applications, featuring several low-power modes and a low-frequency clock divider.

The cost-effective and easy-to-use M5208EVB kit simplifies MCF5207 and MCF5208 product development and speeds time to market. The M5208EVB features full access to the 196-pin fully integrated MCF5208 embedded controller and integrates the MC13192 ZigBee®-ready transceiver and antenna.

## Integrated ColdFire MCF520X Ethernet Microprocessor Block Diagram Block Diagram

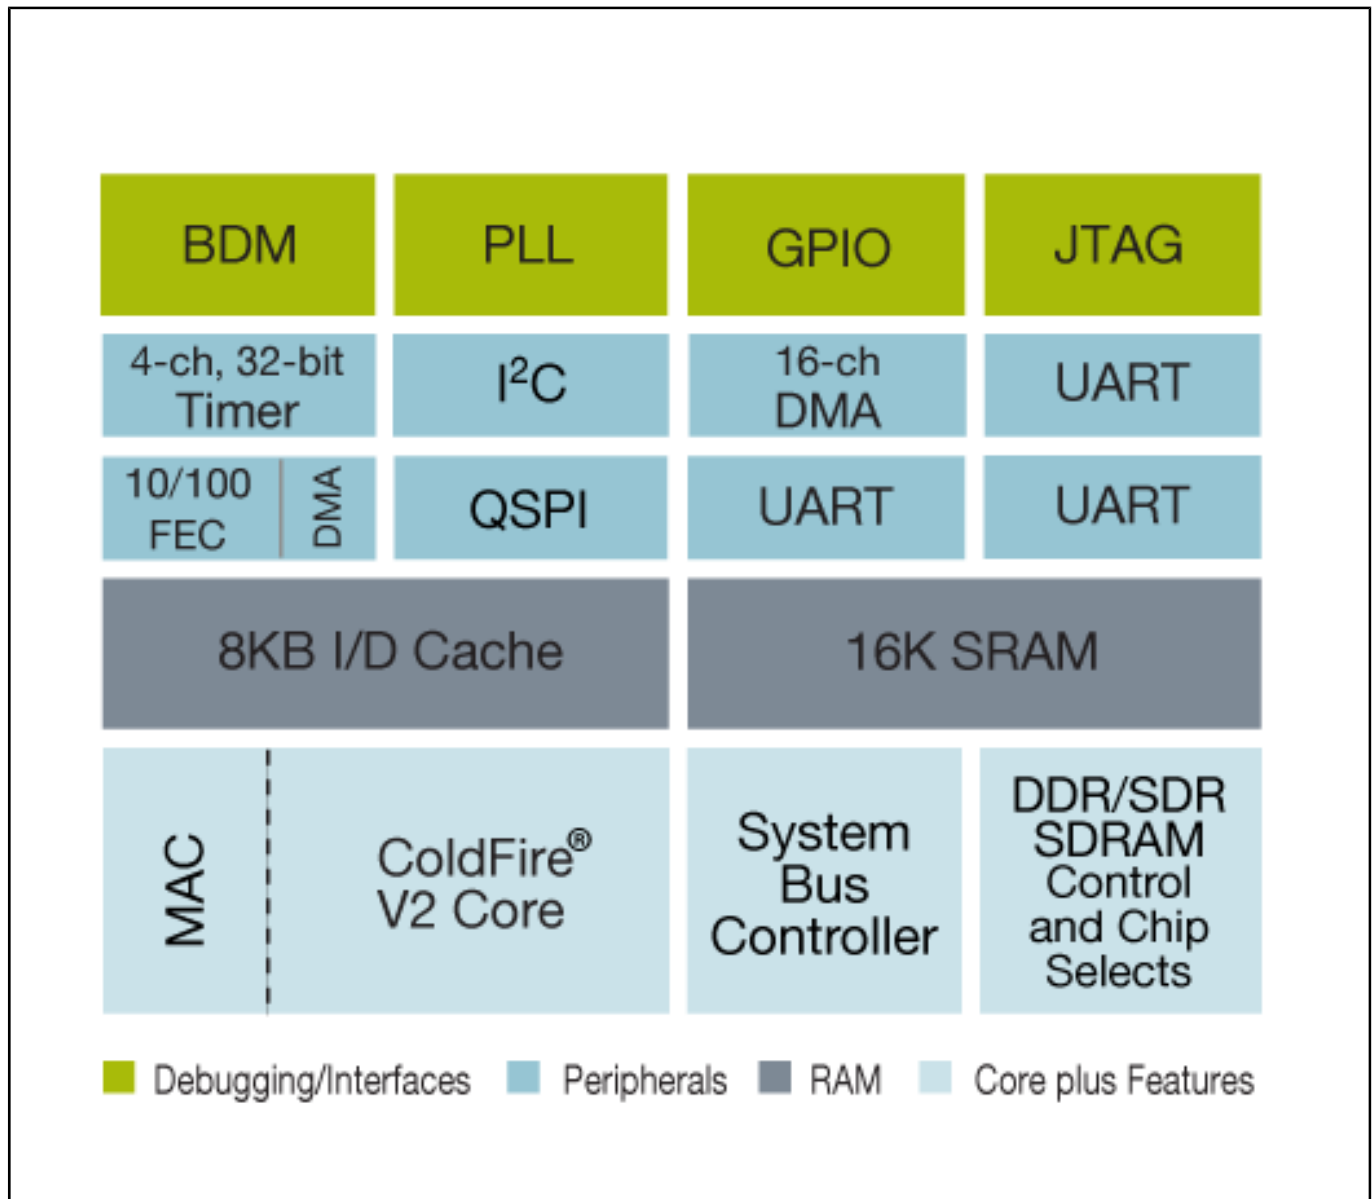

View additional information for [Integrated ColdFire<sup>®</sup> V2 External Memory and Ethernet Microprocessors](#).

**Note:** The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2022 NXP B.V.