



32-Bit Microcontroller with CAN


MCF521X

Last Updated: Apr 9, 2022

The MCF521X microcontroller family is a cost-effective, low-power single-chip solution with up to 521 KB of high-performance, near-single access, interleaved and securable embedded flash memory. Moreover, the MCF521X embedded controller communication peripherals provide easy connection to other systems. Three universal asynchronous receiver/transmitters (UARTS) enable medium-to long-distance communication to other control systems or computers. An inter-integrated circuit (I²C) and queued serial peripheral interface (QSPI) enable in-system communication to connected peripherals and systems, including LCDs and keyboards. This is offered along with the high-performance ColdFire® V2 core that even incorporates a multiply and accumulate module (MAC)-enhanced multiply and accumulate module (eMAC) for DSP-like operation.

Higher-end MCF5214 and MCF5216 provide an upgrade for current MMC2107, MMC2113 and MMC2114 users requiring more flash and/or higher performance with a richer set of the same peripheral mix while standardizing on one cost-effective, low-power MCU family.

ColdFire MCF521X Microcontroller Block Diagram Block Diagram

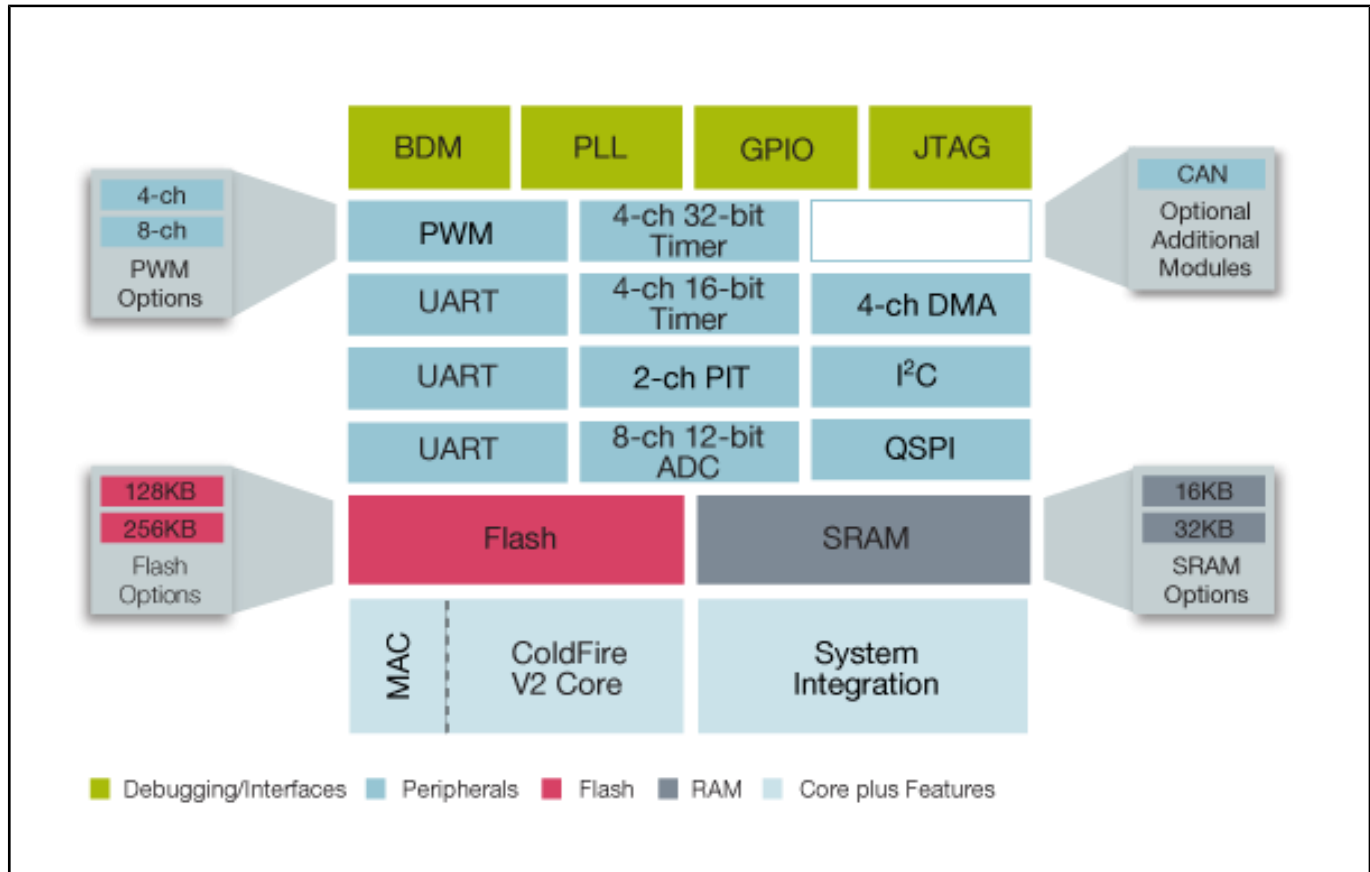

View additional information for [32-Bit Microcontroller with CAN](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2022 NXP B.V.