



Low-Power MPU with dual Ethernet, USB, and audio sub-system

MCF5301x


Not Recommended for New Designs

This page contains information on a product that is not recommended for new designs.

Last Updated: Apr 9, 2022

The MCF5301x 32-bit ColdFire® V3 core microprocessor combines low-power, high integration and connectivity peripherals with a voice codec to give designers an ideal solution for industrial control with embedded voice applications.

ColdFire MCF5301X Microprocessor Block Diagram

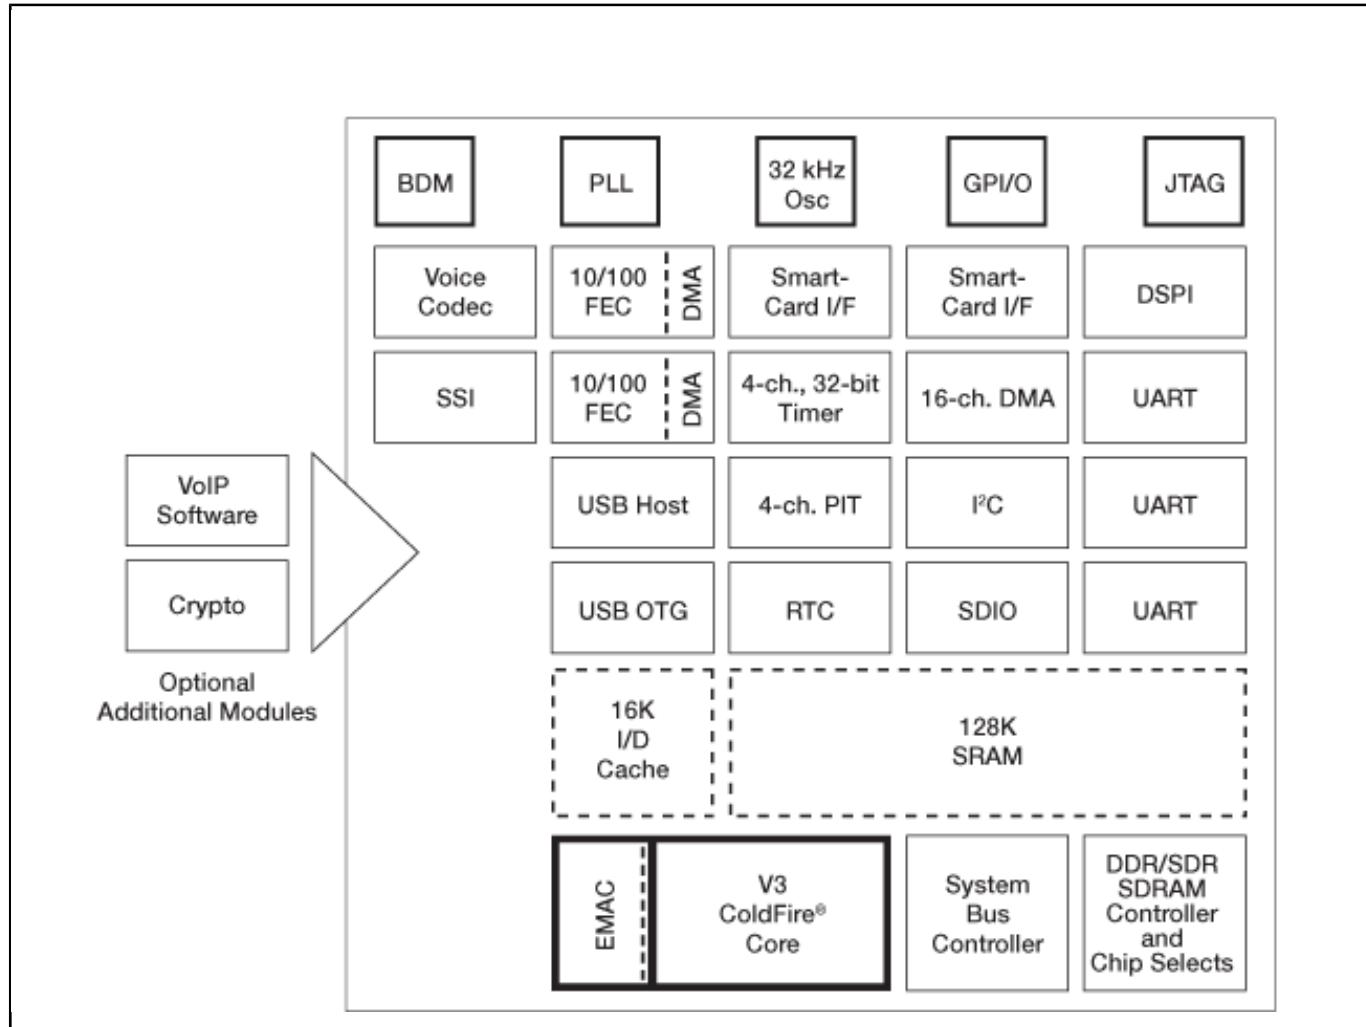

[View additional information for Low-Power MPU with dual Ethernet, USB, and audio sub-system.](#)

Note: The information on this document is subject to change without notice.