



Motorcycle Engine Control Unit (ECU) and Small Engine Control

Last Updated: May 25, 2022


Motorcycle manufacturers will move from carburetors to electronic systems to comply with regulations. Electronically controlled systems enable motorcycles (and other small engine applications) to meet stricter emissions regulations.

NXP's product portfolio includes a wide range of 16- and 32-bit MCUs with companion analog and mixed signal ICs (U-Chip)—offering high-quality, cost-effective solutions for these evolving automotive quality standards.

Additional applications include:

- Scooters/Three-wheelers
- Lawn Equipment
- Electric Generators
- Marine Engines/Personal Watercraft

Motorcycle Engine Control Unit (ECU) and Small Engine Control Block Diagram

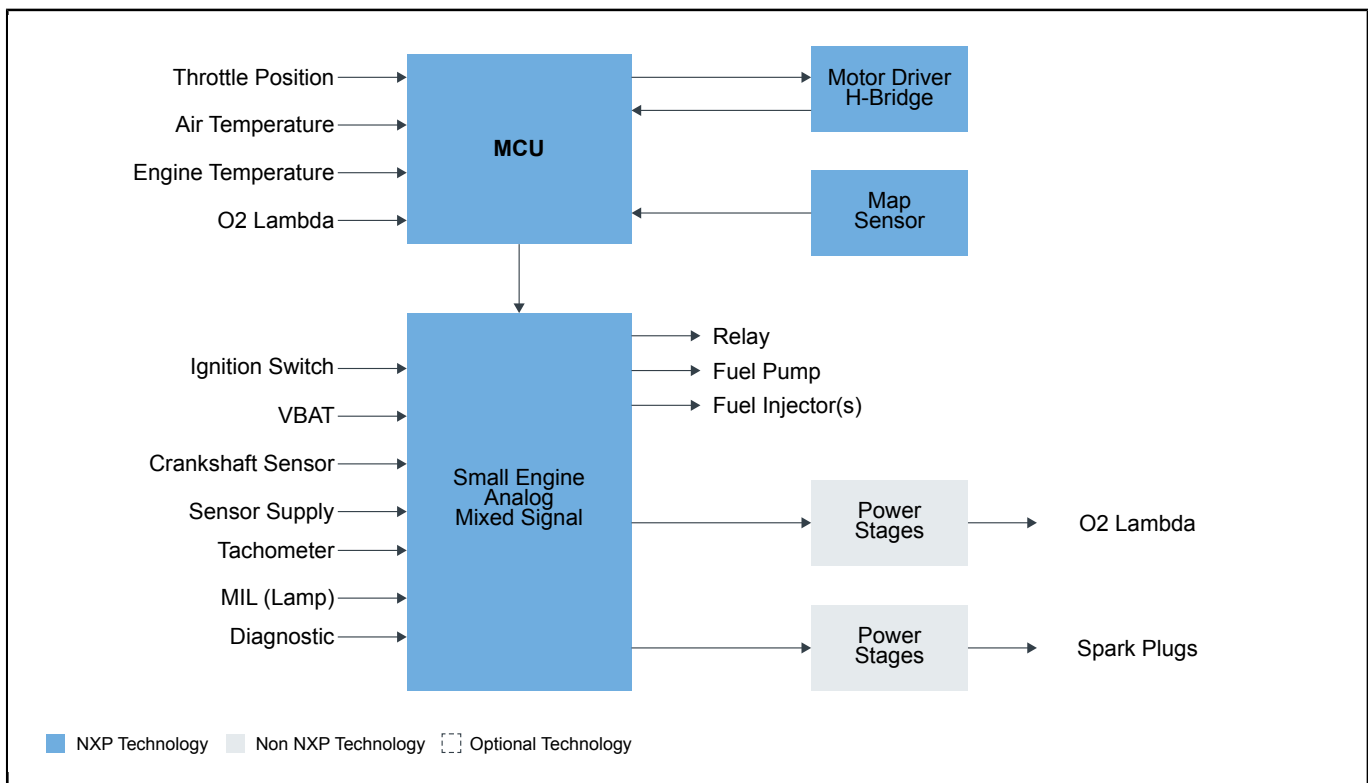

Recommended Products for Motorcycle Engine Control Unit (ECU) and Small Engine Control

Microcontrollers (MCU)	<ul style="list-style-type: none">• KEA: Ultra-Reliable KEA Automotive Microcontrollers (MCUs) based on Arm® Cortex®-M0+ Core• S12XE: Ultra-Reliable S12XE High-Performance Automotive and Industrial Microcontrollers• S12XS: S12XS Automotive and Industrial Microcontrollers (MCUs)• S12P: S12P Automotive and Industrial Microcontrollers (MCUs)• S32K1 Microcontrollers for General-Purpose
Small Engine Analog Mixed Signal	<ul style="list-style-type: none">• MC33814: Two Cylinder Small Engine Control IC• MC33813: One Cylinder Small Engine Control IC• MC33812: Multifunctional Ignition and Injector Driver• MC33810: Automotive Engine Control IC• MC33800: Engine Control Integrated Circuit
Motor driver / H-Bridge	<ul style="list-style-type: none">• MC33931: H-Bridge, Brushed DC Motor Driver, 5-28 V, 5 A, 11 kHz• MC33926: H-Bridge, Brushed DC Motor Driver, 5-28 V, 5 A, 20 kHz• MC33879: Configurable Octal Serial Switch• HB2001: SPI Programmable 10 A H-Bridge Brushed DC Motor Driver• MC33886: H-Bridge, Brushed DC Motor Driver, 5-28 V, 5 A, 10 kHz• MC33887: H-Bridge, Brushed DC Motor Driver, 5-28 V, 5 A, 10 kHz• MC33932: H-Bridge Motor Driver, 5-28 V, 5 A, 11 kHz• PT2000: Programmable Solenoid Controller Gate Driver• HB2000: SPI Programmable 10 A H-Bridge Brushed DC Motor Driver
MAP Sensor	<ul style="list-style-type: none">• MPX4200: Absolute, Integrated Pressure Sensor (20 to 200 kPa)

View our complete solution for [Motorcycle Engine Control Unit \(ECU\) and Small Engine Control](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2022 NXP B.V.