



# S32K3X4EVB-T172 Evaluation Board for Automotive General Purpose

## S32K3X4EVB-T172


Last Updated: Feb 29, 2024

The S32K3X4EVB-T172 is an evaluation and development board for general-purpose industrial and automotive applications.

Based on the 32-bit [Arm® Cortex®-M7 S32K3](#) MCU in a 172 HDQFP package, the S32K3X4EVB-T172 offers dual cores configured in lockstep mode, ASIL D safety hardware, HSE security engine, OTA support, advanced connectivity and low power.

The S32K3X4EVB-T172 offers a standard-based form factor compatible with the Arduino® UNO pin layout, providing a broad range of expansion board options for quick application prototyping and demonstration.

## S32K3X4EVB-T172 Evaluation Board Block Diagram

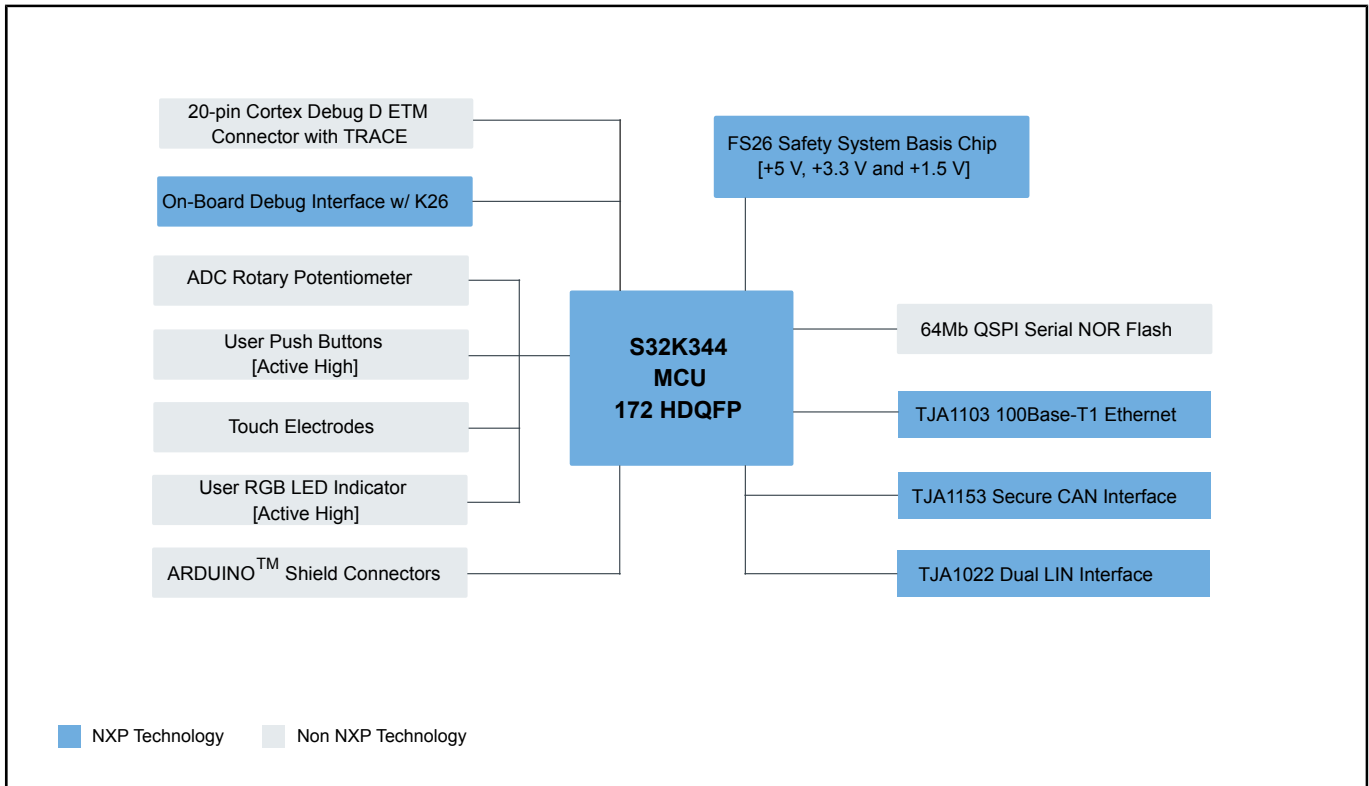

## S32K3 Family Overview Block Diagram

K311	K312	K314	Common Features	K322	K324	K341	K342	K344	K328	K338	K348	K358
1 x Arm® Cortex-M7 @120 MHz		1x Cortex-M7 @240MHz	AEC-Q100, 125 °C, 3,3/5 V	2 x Cortex-M7 @240 MHz		1 Lockstep Cortex-M7 @ 240 MHz			2 x Cortex-M7 @ 240 MHz	3 x Cortex-M7 @ 240 MHz	1 LS Cortex-M7 @ 240 MHz	1 LS Cortex-M7 + 1 Cortex-M7 @ 240 MHz
1 MB Flash	2 MB Flash	4 MB Flash	HSE-B Crypto Security Engine	2 MB Flash	4 MB Flash	1 MB Flash	2 MB Flash	4 MB Flash	8 MB Flash			
128 K SRAM	192 K SRAM	512 K SRAM	FOTA (Firmware Over-the-Air)	256 k SRAM	512 k SRAM	256 k SRAM	256 k SRAM	512 k SRAM	1152 KB SRAM	1152 KB SRAM	1152 KB SRAM	1152 KB SRAM
up to 84 I/Os	up to 143 I/Os	up to 218 I/Os	Low-Power Operating Modes and Peripherals (LP UART, FlexIO)	up to 143 I/Os	up to 218 I/Os	up to 143 I/Os	up to 143 I/Os	up to 218 I/Os	up to 218 I/Os			
16-ch, eDMA		32-ch, eDMA	ASIL B/D Safety: (ECC Memories, MPU, CRC, Watchdogs)	32-ch, eDMA					32-ch, eDMA			
3 x CAN (3 x FD)	6 x CAN (6 x FD)		100 Mbit/s Ethernet (TSN)	4 x CAN (4 x FD)	6 x CAN (6 x FD)	4 x CAN (4 x FD)	4 x CAN (4 x FD)	6 x CAN (6 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)
			100 Mbit/s Ethernet (TSN)	100 Mbit/s Ethernet (TSN)					1 Gbit/s Ethernet (TSN)			
2 x I2C	2 x I2C	2 x I2C	eMIOS Timers, Analogue Comparator, Logic Control Unit, Body Cross Triggering Unit, Trigger Mux	2 x I2C	2 x I2C	2 x I2C	2 x I2C	2 x I2C	2 x I2C			
4 x SPI*		6 x SPI*	JTAG	4 x SPI*	6 x SPI*	4 x SPI*	4 x SPI*	6 x SPI*	6 x SPI*			
2 x 24-ch, 12-bit ADC		3 x 24-ch, 12-bit ADC	S32 Design Studio IDE	2 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC	2 x 24-ch, 12-bit ADC	2 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC			
			2 x SAI (FS)	2 x SAI (FS)					2 x SAI (FS)			
			Quad SPI	Quad SPI					Quad SPI + SDHC (SDIO)			
LOFP-48	HDQFP-172		Real-Time Drivers (AUTOSAR® and Non-AUTOSAR)	HDQFP-172				HDQFP-172				
HDQFP-100				HDQFP-100		HDQFP-100	HDQFP-100					
			Security FW Safety Software Framework Application Software	MAPBGA-257		MAPBGA-257		MAPBGA-257	MAPBGA-289			

View additional information for [S32K3X4EVB-T172 Evaluation Board for Automotive General Purpose](#).

Note: The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.