



# ICODE® SLIX-S

## SL2S5302\_SL2S5402

Last Updated: Apr 9, 2022

The ICODE SLIX-S IC is a dedicated chip for smart label applications with the need for a higher security level, larger memory and/or a product, which takes care of the increasing demand for perfect customer privacy. This IC is the third generation of a product family of smart label ICs based on the ISO standards ISO/IEC 15693 and ISO/IEC 18000-3, prolonging a successful story of NXP in the field of vicinity identification systems.


### Contactless energy and data transfer

Whenever connected to a very simple and easy-to-produce type of antenna, the ICODE SLIX-L IC can be operated without line of sight up to a distance of 1.5 m (gate width), no battery needed. When the smart label is positioned in the field of an interrogator antenna, the high-speed RF communication interface enables data to be transmitted up to 53 kbit/s.

### Anti-collision

An intelligent anti-collision function enables several tags to operate in the field simultaneously. The anti-collision algorithm selects each tag individually and ensures that the execution of a transaction with a selected tag is performed correctly without data corruption resulting from other tags in the field.

# SL2S5302\_SL2S5402 block diagram Block Diagram

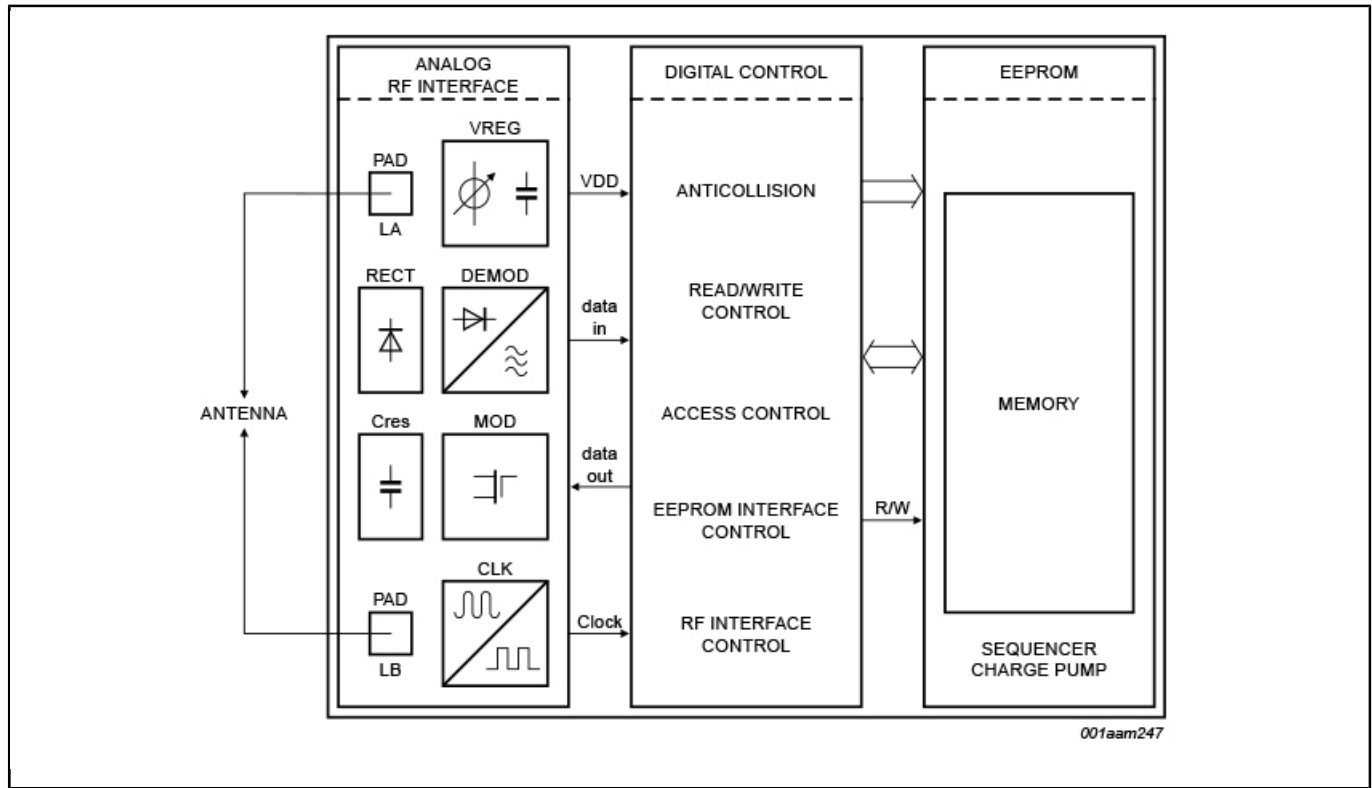

View additional information for [ICODE® SLIX-S](#).

**Note:** The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.