




Smart NIC

Last Updated: Nov 12, 2021

Smart NIC's offload various functions from servers. The Layerscape LX2160A device is used in two different Smart NIC configurations. For NICs with 50Gbps of throughput, it can be the main silicon, implementing the network ports and the SR-IOV PCIe interface to the host, while easily fitting in the 75W power budget. For higher capacity NICs, it can work with an FPGA, for instance as the control plane or exception path.

SmartNIC Block Diagram

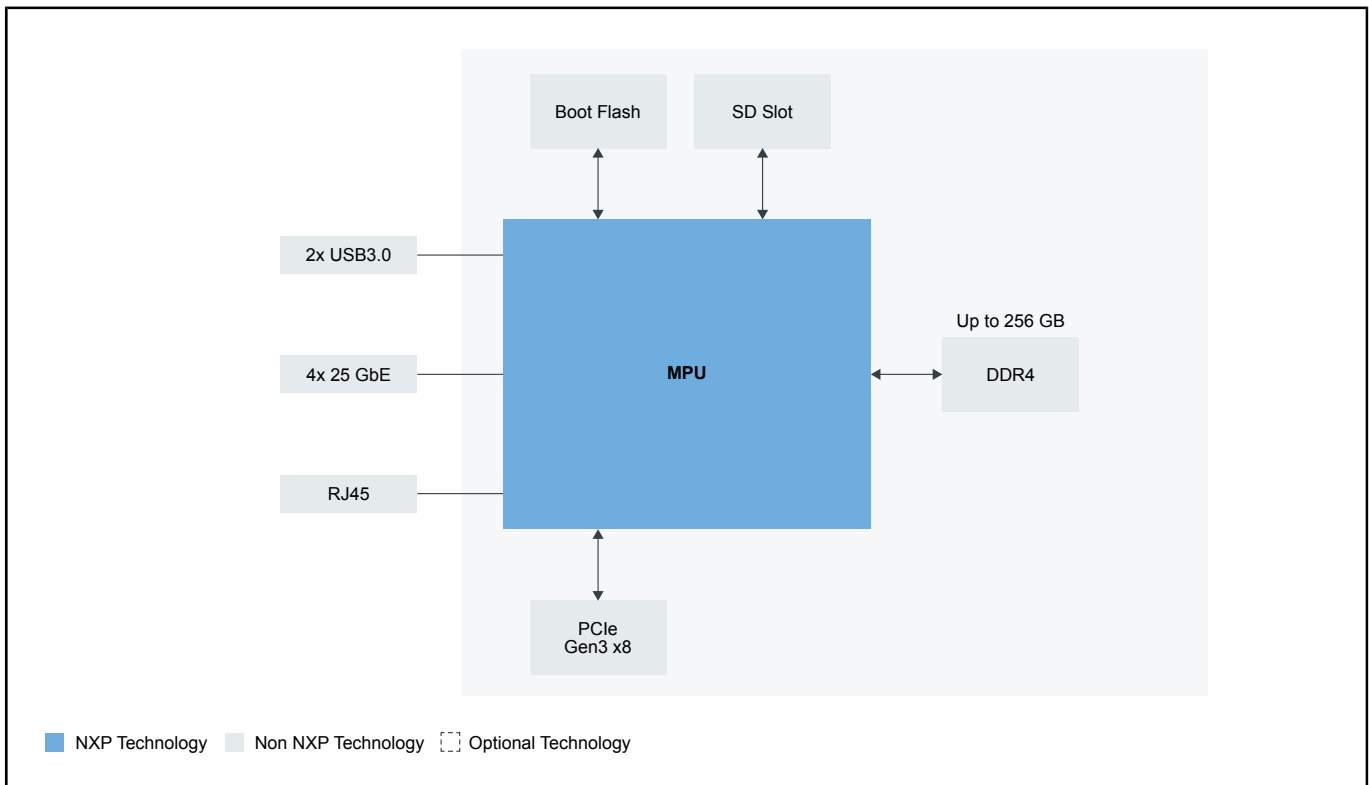

Recommended Products for SmartNIC

MPU	<ul style="list-style-type: none">• Layerscape® LX2160A, LX2120A, LX2080A Processors
-----	--

View our complete solution for [Smart NIC](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2021 NXP B.V.