



Mini High-Speed CAN System Basis Chip

UJA1169ATK


Last Updated: Feb 14, 2024

The UJA1169ATK is a mini high-speed CAN system basis chip (SBC) family containing an ISO 11898-2:2016 and SAE J2284-1 to SAE J2284-5 compliant HS-CAN transceiver including CAN FD up to 5 Mbit/s and an integrated 5 V or 3.3 V, 250 mA supply. It also features a watchdog, a serial peripheral interface (SPI) and LIMP output.

The UJA1169ATK comes in six variants:

- The UJA1169ATK, UJA1169ATK/F, UJA1169ATK/X and UJA1169ATK/X/F contain a 5 V regulator (V1). V1 is a 3.3 V regulator in the UJA1169ATK/3 and the UJA1169ATK/F/3.
- The UJA1169ATK/X and UJA1169ATK/X/F are equipped with a 5 V supply (VEXT) for off-board loads.
- The UJA1169Axx/F variants support ISO 11898-2:2016 compliant CAN partial networking with a selective wake-up function incorporating CAN FD-passive.

UJA1169ATK Block Diagram Block Diagram

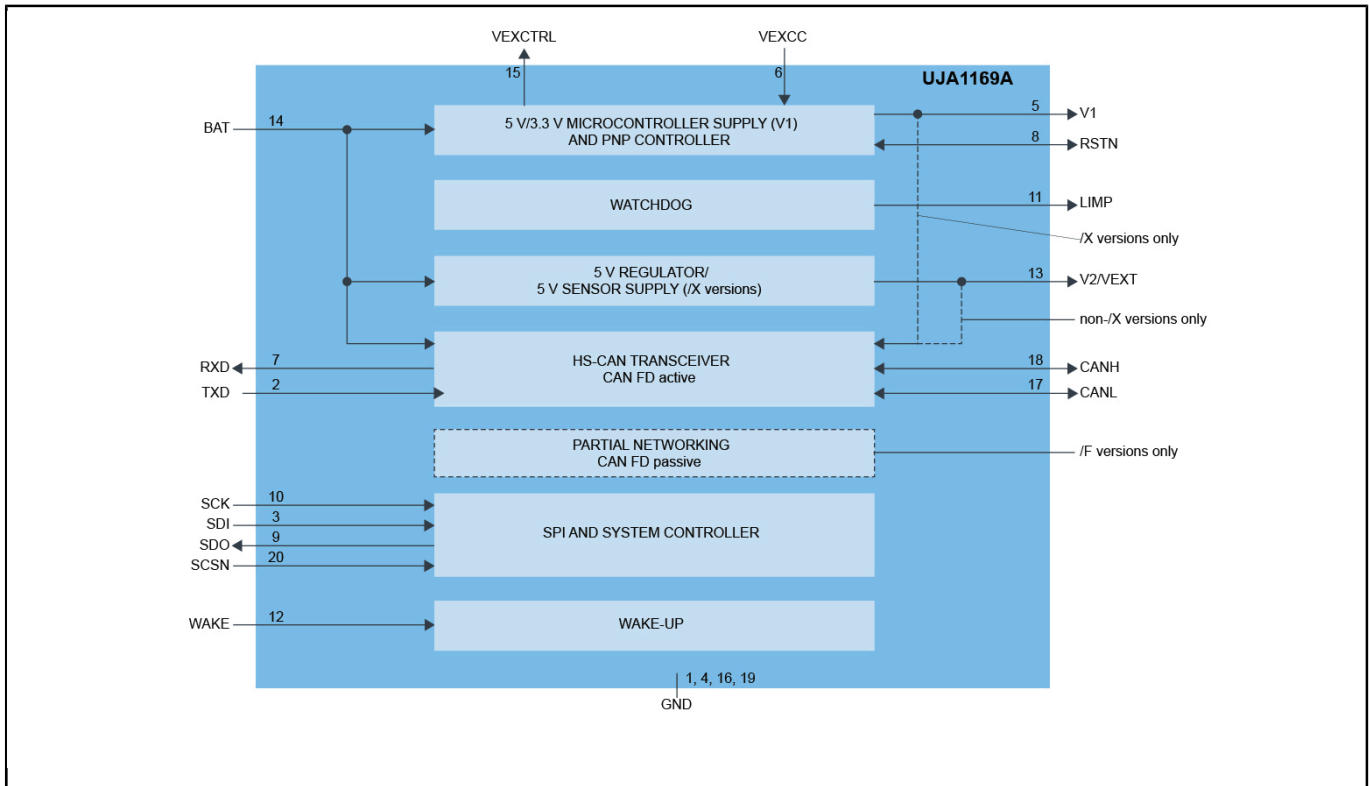

View additional information for [Mini High-Speed CAN System Basis Chip](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.