



USB to Serial Bridge – a Ready Play® Solution

USB2SER


Not Recommended for New Designs

This page contains information on a product that is not recommended for new designs.

Last Updated: Apr 8, 2022

Our new Ready Play® solutions integrate certified functionality to different applications, allowing customers to add features while reducing development cost, simplifying design cycles and enabling scalability in applications and systems. We are developing a complete range of Ready Play solutions. The first product in our Ready Play solutions series is a USB to Serial bridge (USB2SER). USB2SER is a USB to UART bridge controller on 5x5mm lead free QFN24. It is a simple low cost solution that enables USB for an embedded system with a UART port, which reduces external components count. It supports USB 2.0 full-speed and TTL RS232 or RS485 UART with options for hardware flow control, software flow control (Xon-Xoff), even or odd parity and stop bits configuration. The USB2SER is fully compliant with the USB 2.0 specification, and it can act as a CDC standard device which eliminates the need for custom drivers for operation when flow-control is not needed (only an INF file is required).

USB2SER Block Diagram Block Diagram

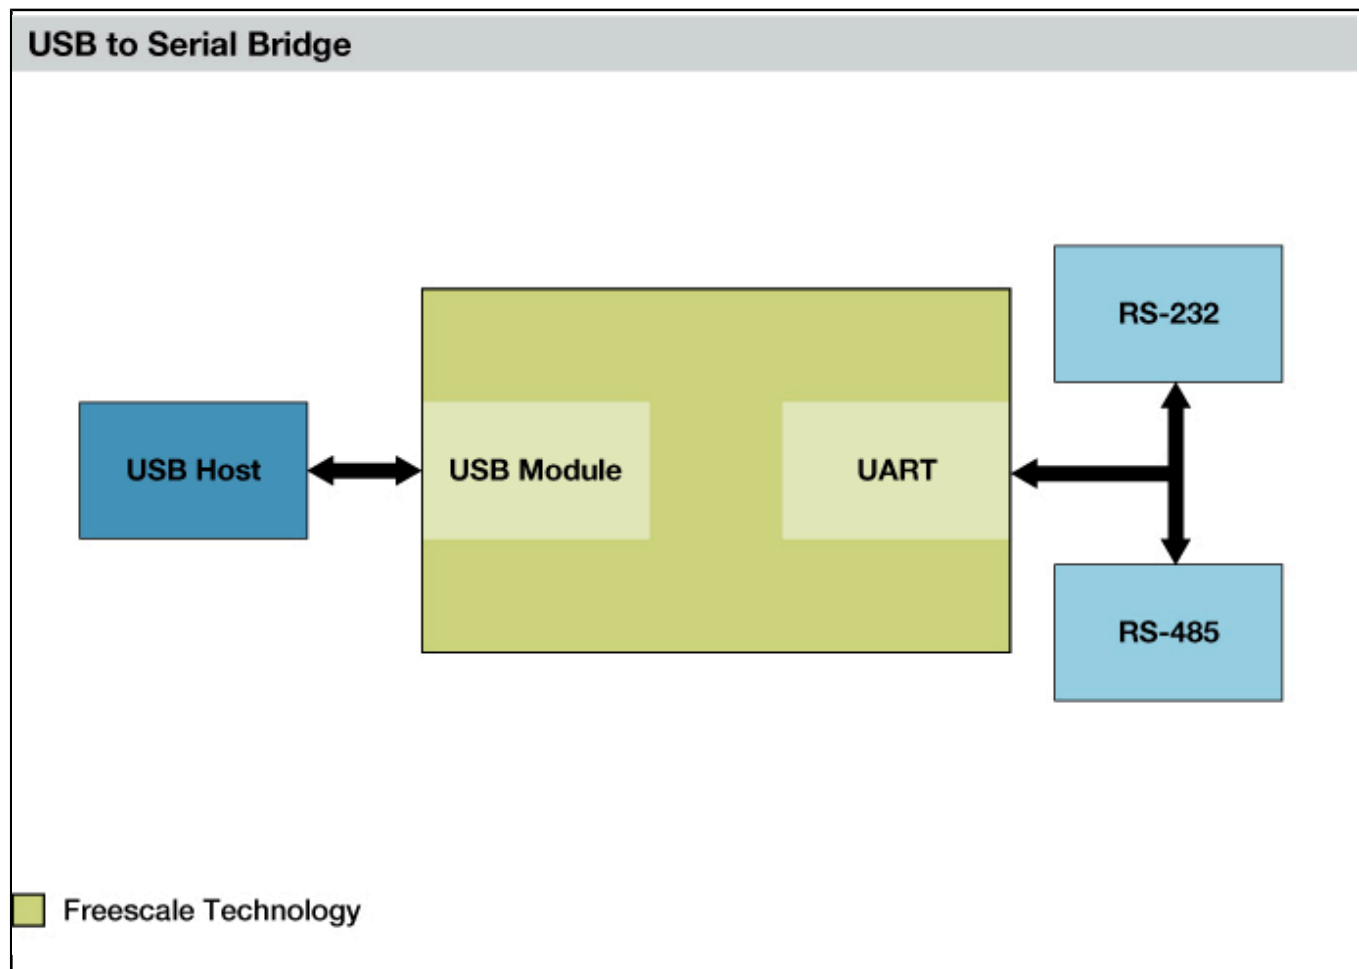

View additional information for [USB to Serial Bridge - a Ready Play® Solution](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.