



i.MX RT1020 Crossover MCU with Arm® Cortex®-M7 Core Operating Up to 500 MHz

i.MX-RT1020


Last Updated: Jul 26, 2023

i.MX RT1020 Crossover MCUs are based on the Arm® Cortex®-M7 core for real-time performance and high integration for Industrial and IoT applications.

The i.MX RT1020 CM7 operates at up to 500 MHz with 256 KB on-chip RAM that can be configured as TCM or general-purpose. The family offers various memory interfaces and a wide range of connectivity interfaces including UART, SPI, I²C, USB, 10/100M Ethernet and CAN. 144 LQFP and 100 LQFP packages for low-cost PCB designs.

The i.MX RT1020 family is supported by the [MCUXpresso ecosystem](#), which includes an SDK, a choice of IDEs and secure provisioning and configuration tools to enable rapid development.

i.MX RT1020 Crossover MCU Block Diagram

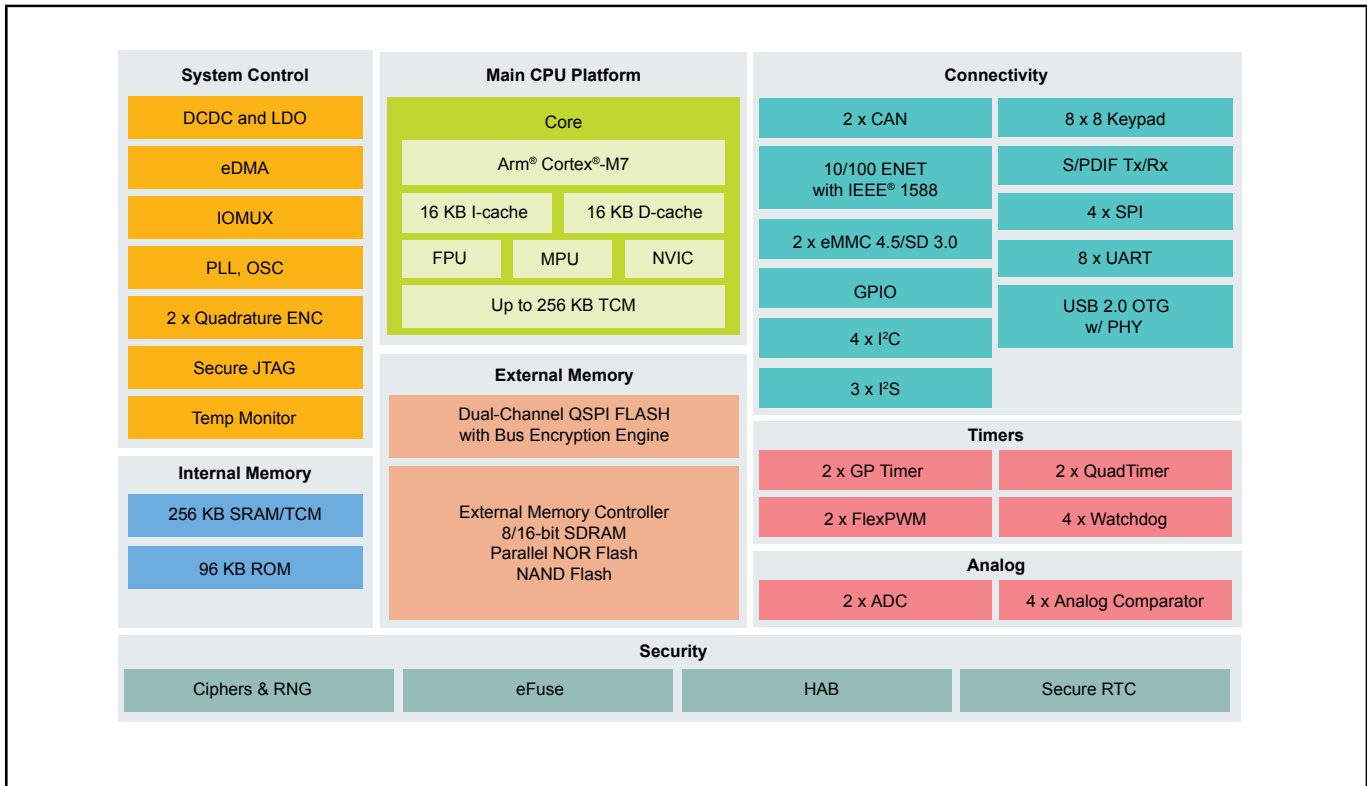

View additional information for [i.MX RT1020 Crossover MCU with Arm® Cortex®-M7 Core Operating Up to 500 MHz](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2023 NXP B.V.