




# Multimedia Applications Processors – Integrated Power Management, Ethernet, Resistive Touch Screen, Arm9™ Core

## i.MX285

Last Updated: Jun 1, 2026

The core of the i.MX285 is Our fast, proven, power-efficient implementation of the Arm926EJ-S™ core, with speeds of up to 454 MHz. With attention to overall system cost, i.MX28 integrates physical USB interfaces (PHY), a 10/100 Ethernet, power management, and a resistive touch screen display controller. This processor with full AEC –Q100 automotive qualification is ideal for automotive infotainment systems featuring display and touch screen control systems. As a result, the i.MX285 enables many of the features only available in high-end systems, but at a price point suitable for all vehicles.

## i.MX285 Applications Processor Block Diagram Block Diagram

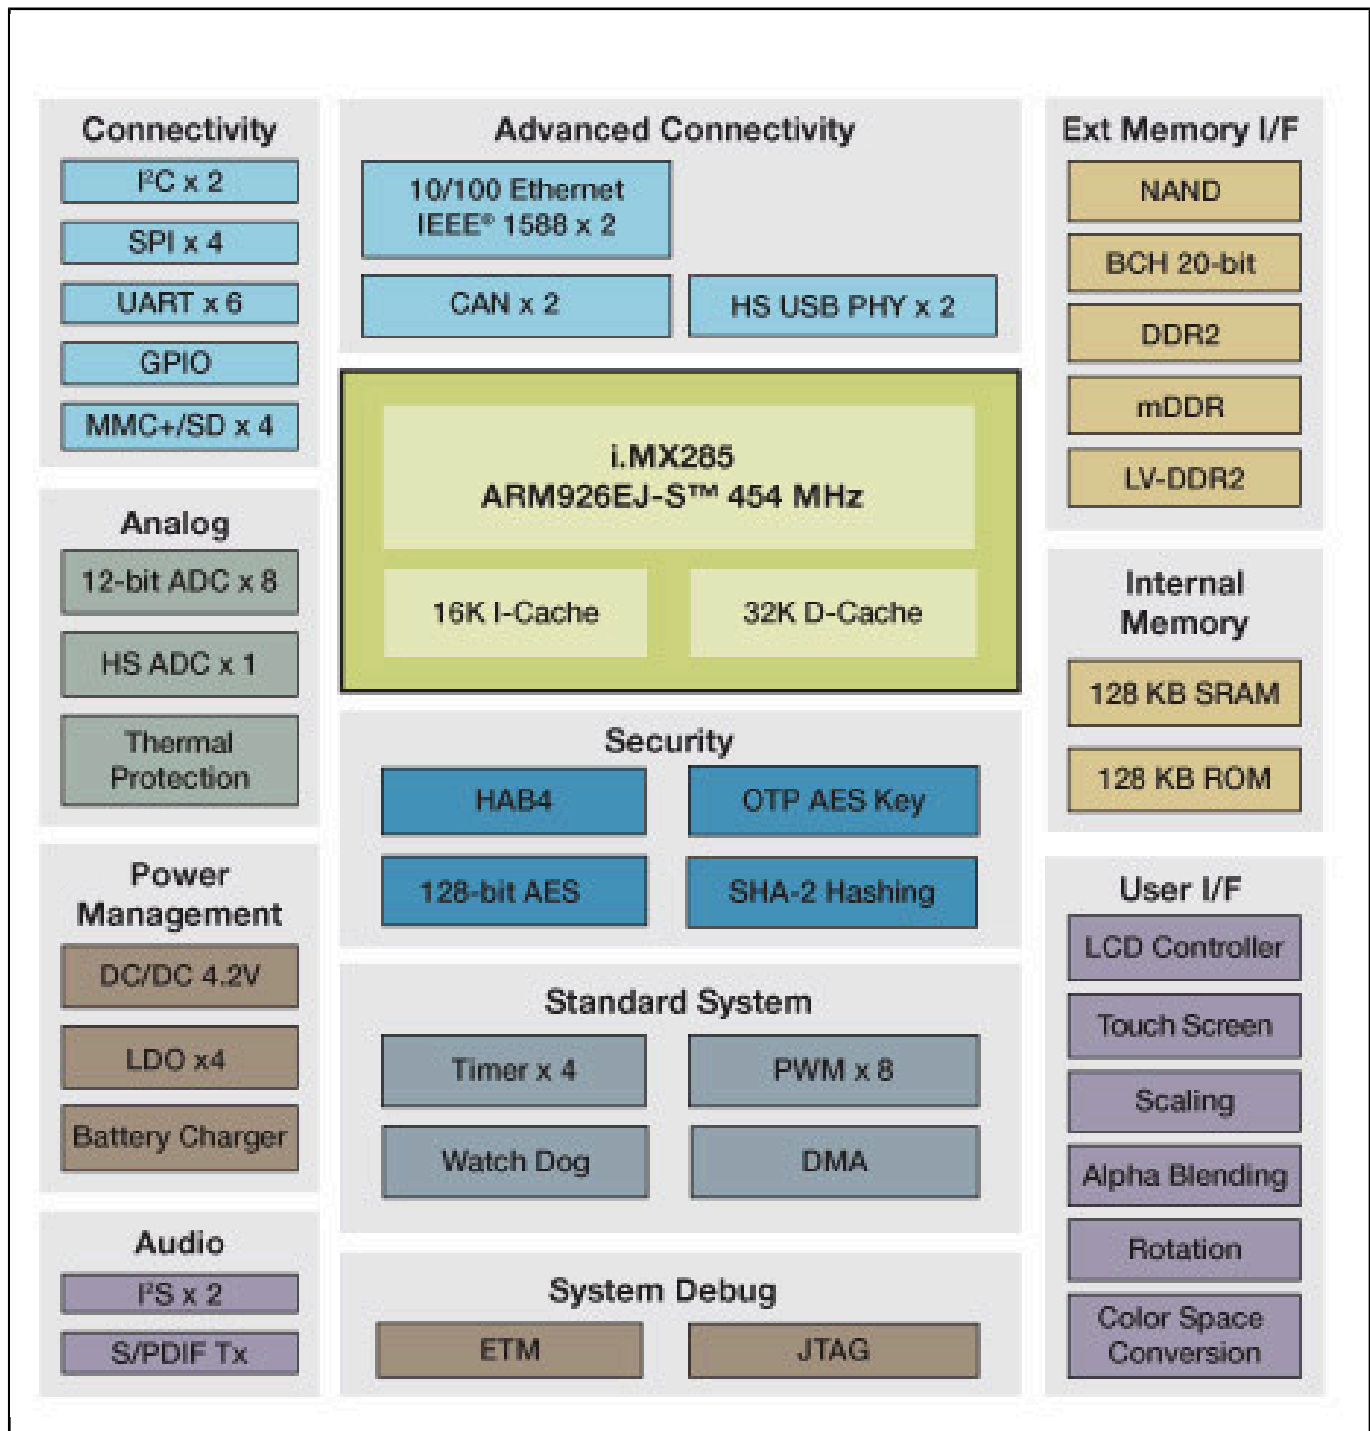

View additional information for [Multimedia Applications Processors - Integrated Power Management, Ethernet, Resistive Touch Screen, Arm9™ Core](#).

Note: The information on this document is subject to change without notice.

**[www.nxp.com](http://www.nxp.com)**

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2026 NXP B.V.