

QorlQ® Qonverge BSC9132 Dual- Core Processor and Dual-Core DSP


BSC9132

Last Updated: Jan 16, 2023

The BSC9132 is a highly integrated device that targets small cell base station, enterprise VoIP, smart grid control, military/defense and industrial applications. The BSC9132 device combines two e500 cores, built on Power Architecture® technology, and two StarCore® SC3850 cores with MAPLE-B2P baseband acceleration processing elements to address the need for a high-performance, low-cost, integrated solution that handles a broad range of specialist DSP functions with complimentary high-performance general purpose processing.

For small cell applications, the BSC9132 supports multimode operation with 20 MHz LTE TDD or FDD, and WCDMA 5 MHz.

BSC9132 BD Block Diagram

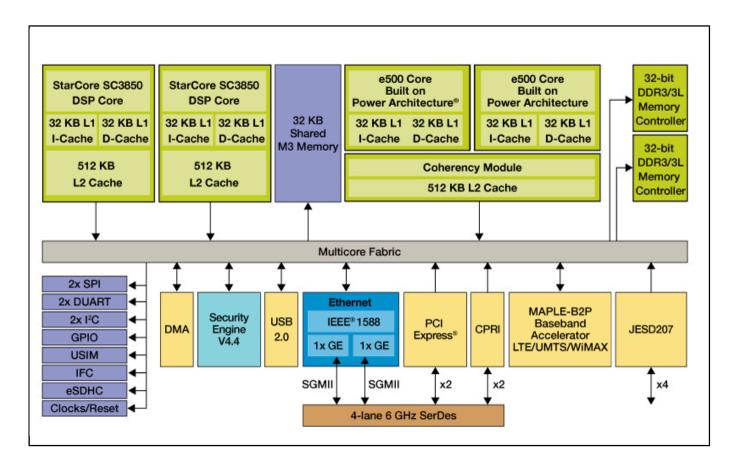

View additional information for QorlQ® Qonverge BSC9132 Dual-Core Processor and Dual-Core DSP.

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.