# 16/32-bit Arm® microcontrollers; 256 kB ISP/IAP flash with CAN, 10-bit ADC and external memory interface

## LPC2292FET144

新規採用非推奨
このページでは、新規設計を推奨しない製品に関する情報を掲載しています。

Last Updated: Apr 8, 2022

The LPC2292/2294 microcontrollers are based on a 16/32-bit Arm7TDMI-S™ CPU with real-time emulation and embedded trace support, together with 256 kB of embedded high-speed flash memory. A 128-bit wide memory interface and a unique accelerator architecture enable 32-bit code execution at the maximum clock rate. For critical code size applications, the alternative 16-bit Thumb mode reduces code by more than 30 % with minimal performance penalty.

With their 144-pin package, low power consumption, various 32-bit timers, 8-channel 10-bit ADC, 2/4 (LPC2294) advanced CAN channels, PWM channels and up to nine external interrupt pins these microcontrollers are particularly suitable for automotive and industrial control applications as well as medical systems and fault-tolerant maintenance buses. The number of available GPIOs ranges from 76 (with external memory) through 112 (single-chip). With a wide range of additional serial communications interfaces, they are also suited for communication gateways and protocol converters as well as many other general-purpose applications.

Remark:Throughout the data sheet, the term LPC2292/2294 will apply to devices with and without the /00 or /01 suffix. The suffixes /00 and /01 will be used to differentiate from other devices only when necessary.

## Block diagram: LPC2292FBD144, LPC2292FET144, LPC2294HBD144 Block Diagram
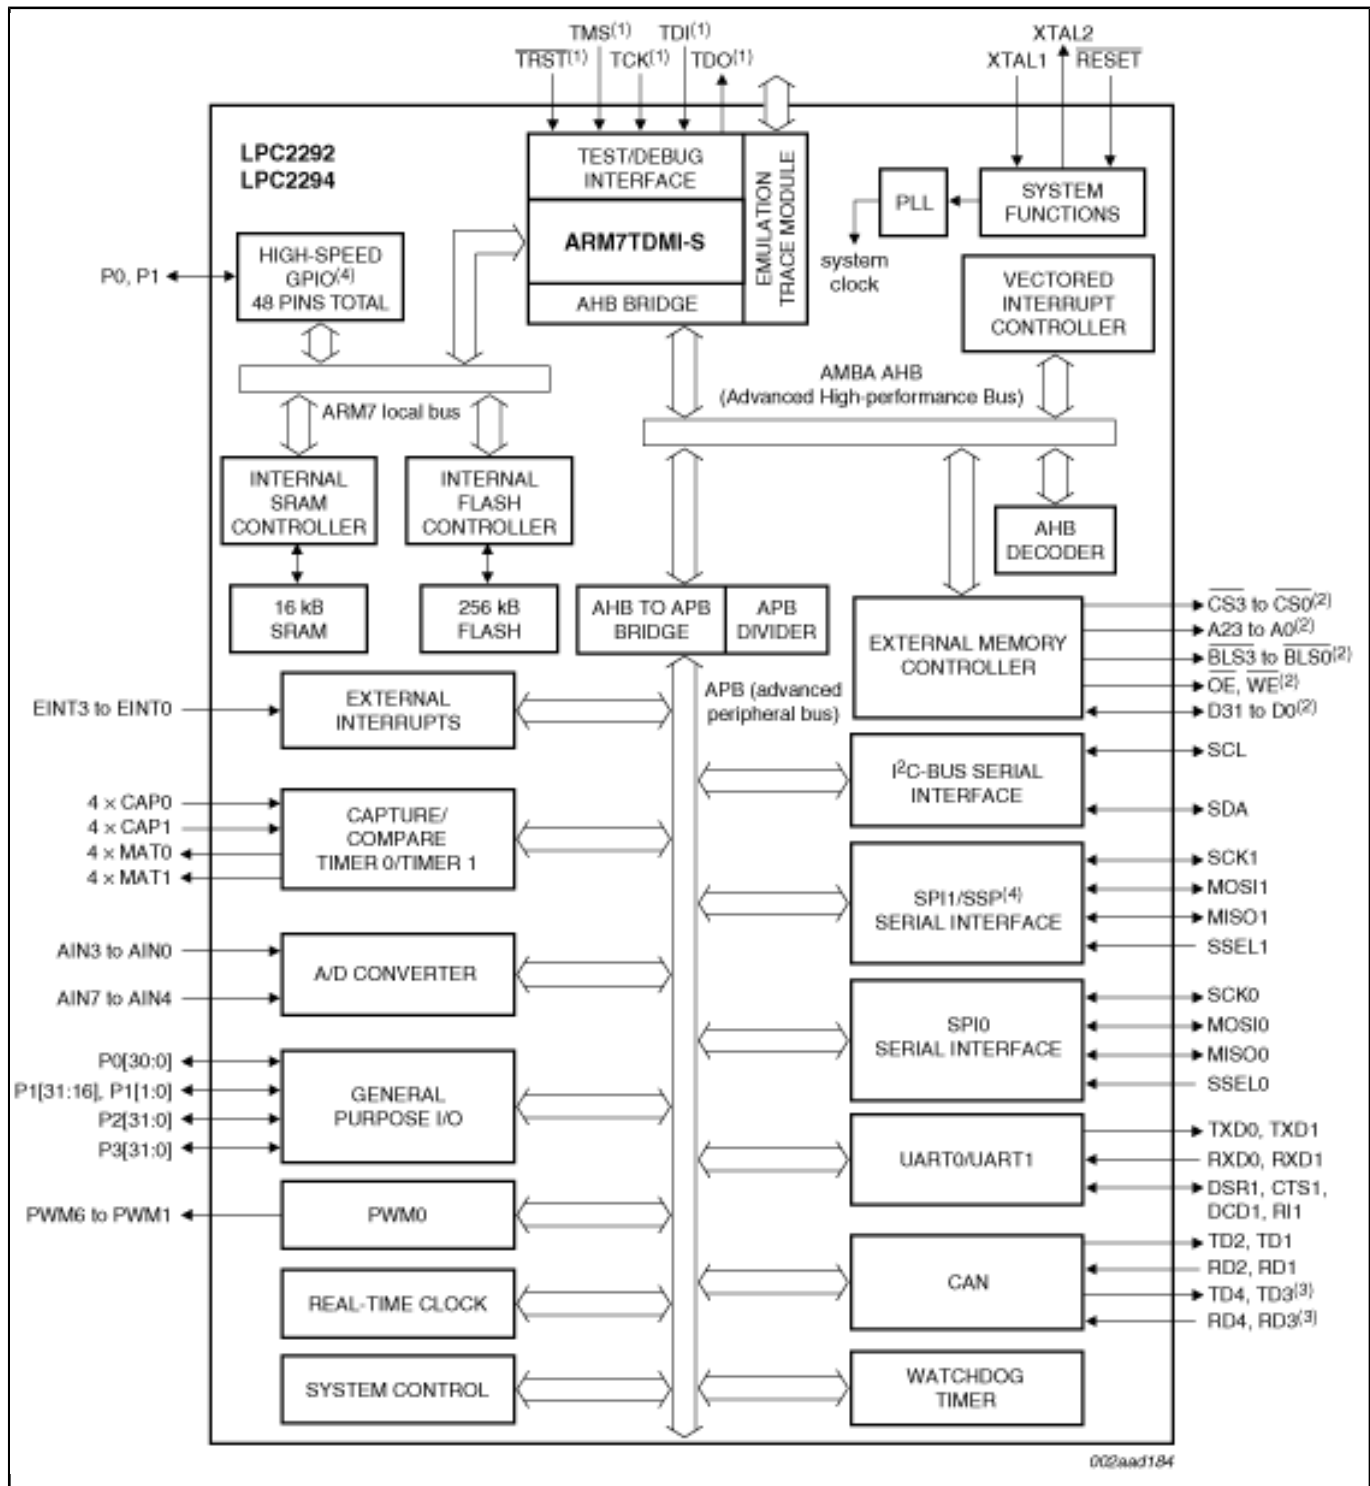


View additional information for 16/32-bit Arm® microcontrollers; 256 kB ISP/IAP flash with CAN, 10-bit ADC and external memory interface.

**Note:** The information on this document is subject to change without notice.

**www.nxp.com**