



# **$\pm 2g/\pm 4g/\pm 8g$ , Low g, 12-Bit Digital Accelerometer**

## **MMA8452Q**

新規採用非推奨

このページでは、新規設計を推奨しない製品に関する情報を掲載しています。


Last Updated: Sep 26, 2023

This product is in “End of Life” status, we recommend FXLS8974CF or FXLS8967AF as a replacement.

The NXP® MMA8452Q is a low-power, three-axis capacitive micromachined accelerometer with 12 bits of resolution, featuring:

- Embedded functions with flexible user-programmable options, configurable to two interrupt pins
- Embedded interrupt functions for overall power savings relieving the host processor from continuously polling data
- User-selectable full scales of  $\pm 2g/\pm 4g/\pm 8g$  with high-pass filtered data as well as non-filtered data available real-time
- Inertial wake-up interrupt signals from any combination of the configurable embedded functions allowing the MMA8452Q to monitor events and remain in a low-power mode during periods of inactivity

## MMA8452Q Acceleration Sensor Block Diagram Block Diagram

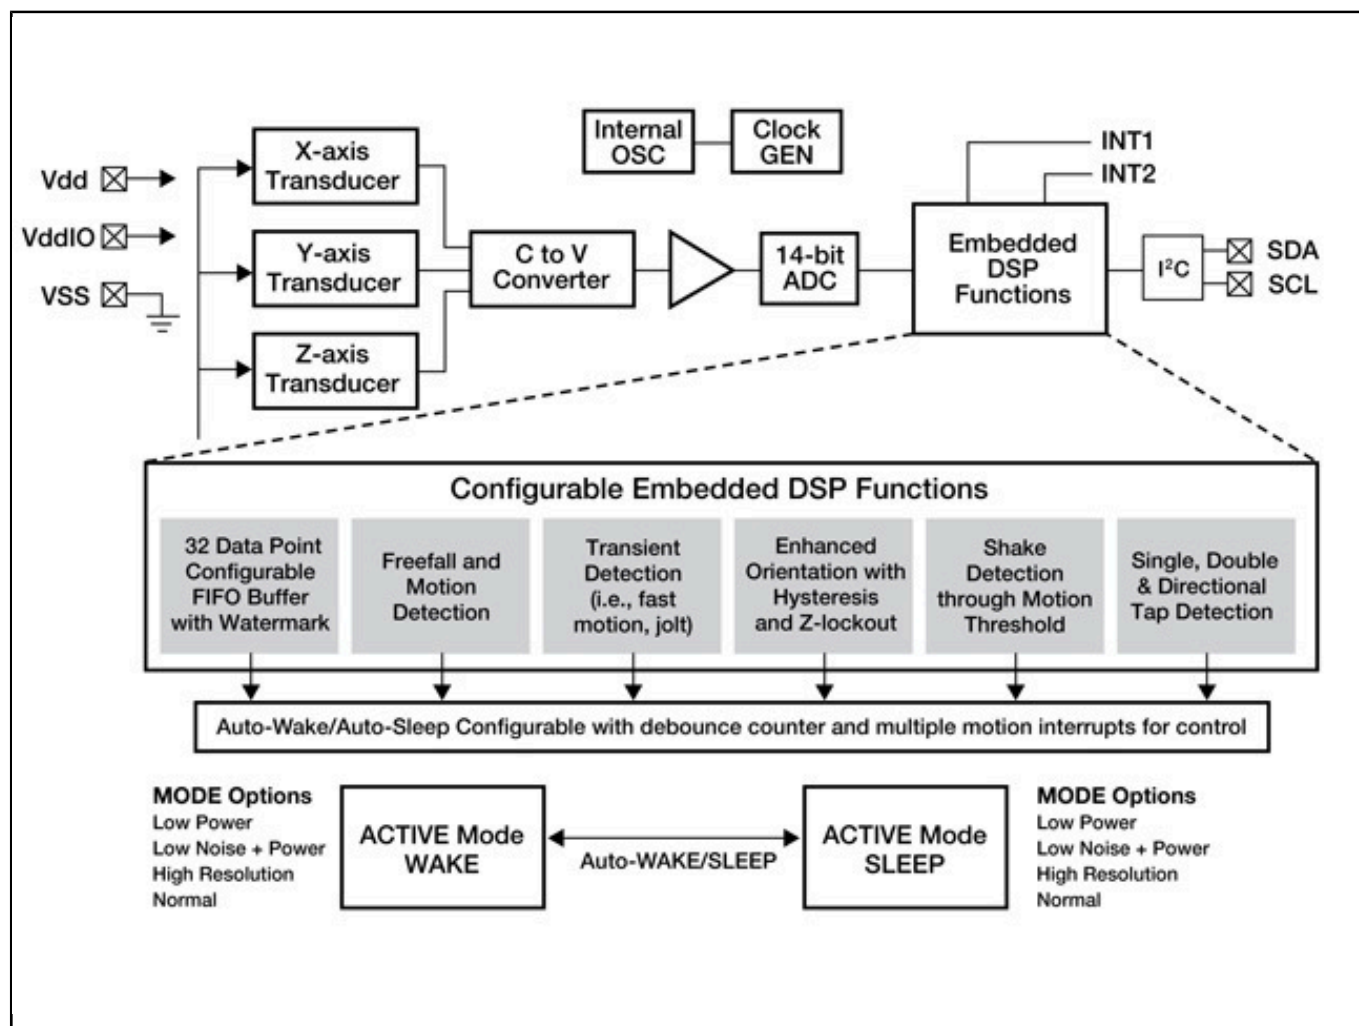

View additional information for [±2g/±4g/±8g, Low g, 12-Bit Digital Accelerometer](#).

**Note:** The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.