

# ERRATA SHEET

**Date:** 2008 Mar 10  
**Document Release:** Version 1.2  
**Device Affected:** P89LPC912

This errata sheet describes both the functional deviations and any deviations from the electrical specifications known at the release date of this document.

Each deviation is assigned a number and its history is tracked in a table at the end of the document.

2008 Mar 10

**Identification:**

The typical P89LPC912 devices have the following top-side marking:

P89LPC912x x  
xxxxxxx xx  
xxYYWW R

The last letter in the third line (field 'R') will identify the device revision. This Errata Sheet covers the following revisions of the P89LPC912:

Revision Identifier (R)	Comment
'_'	Initial device revision

Field 'YY' states the year the device was manufactured. Field 'WW' states the week the device was manufactured during that year.

**Errata Overview - Functional Problems**

Functional Problem	Short Description	fixed in revision	added
I/O.1	Port Configuration	none	v1.0
I/O.2	Port 2.4 can draw additional power	none	v1.0
ICP.1	ICP Global Erase	none	v1.0
RESET.1	External reset does not function correctly when using DIVM	none	v1.1
DIVM.1	Using DIVM in power-down mode	none	v1.2
I/O.3	Port 3.0 can be an output during a power-up cycle	none	v1.2

**Errata Overview - AC/DC Deviations**

AC/DC Deviation	Short Description	fixed in revision	added
-	-	-	-

**Errata Notes**

Note	Short Description	added
V <sub>DD</sub> .1	V <sub>DD</sub> Power cycling.	v1.2
IRC.1	Internal RC oscillator accuracy	v1.2

## Functional Deviations of P89LPC912

### I/O.1: Port Configuration

**Introduction:** The I/O ports of the LPC912 can be configured to 4 different modes by writing to the PxM1 and PxM2 registers. The default mode after Reset is "Input Only".

**Problem:** Coming out of Reset, the LPC912 port registers should be initialized as follows. Without executing this sequence, the LPC912 could consume additional power.

**Workaround:** Initialize the LPC912 ports in two steps:

Step 1: Configure all port registers with this initialization.

```
P0M1 = 0x00;           // set P0 to quasi-bidirectional
P1M1 = 0x00;           // set P1 to quasi-bidirectional
P2M1 = 0x00;           // set P2 to quasi-bidirectional
P3M1 = 0x00;           // set P3 to quasi-bidirectional
```

Step 2: Configure the port pins on the LPC912 to their required mode using only AND and OR operations. Make sure to modify only the port pins available on the LPC912.

### I/O.2: Port 2.4 can draw additional power

**Introduction:** Port 2.4 is a general purpose I/O pin.

**Problem:** P2.4 always has an active internal pull-up, which will draw additional power when the port is written low.

**Workaround:** No known workaround.

### ICP.1: ICP Global Erase

**Introduction:** The LPC912 can be programmed using ICP (In Circuit Programming). One of the ICP functions is the Erase Global command, which will erase the entire chip including the security bytes and configuration information.

**Problem:** When giving the Erase Global command through the ICP interface the LPC912 will not clear the busy flag and stay busy forever.

**Workaround:** The workaround can be done in 4 steps:

Step 1: Shift out the WR\_FMCON command followed by the Erase Global opcode.

Step 2: Wait 5ms.

Step 3: Do 8 dummy reads with the RD\_FMDATA\_I command.

Step 4: Read FMCON until the busy flag gets cleared.

Please also see figure 1 on the following page.

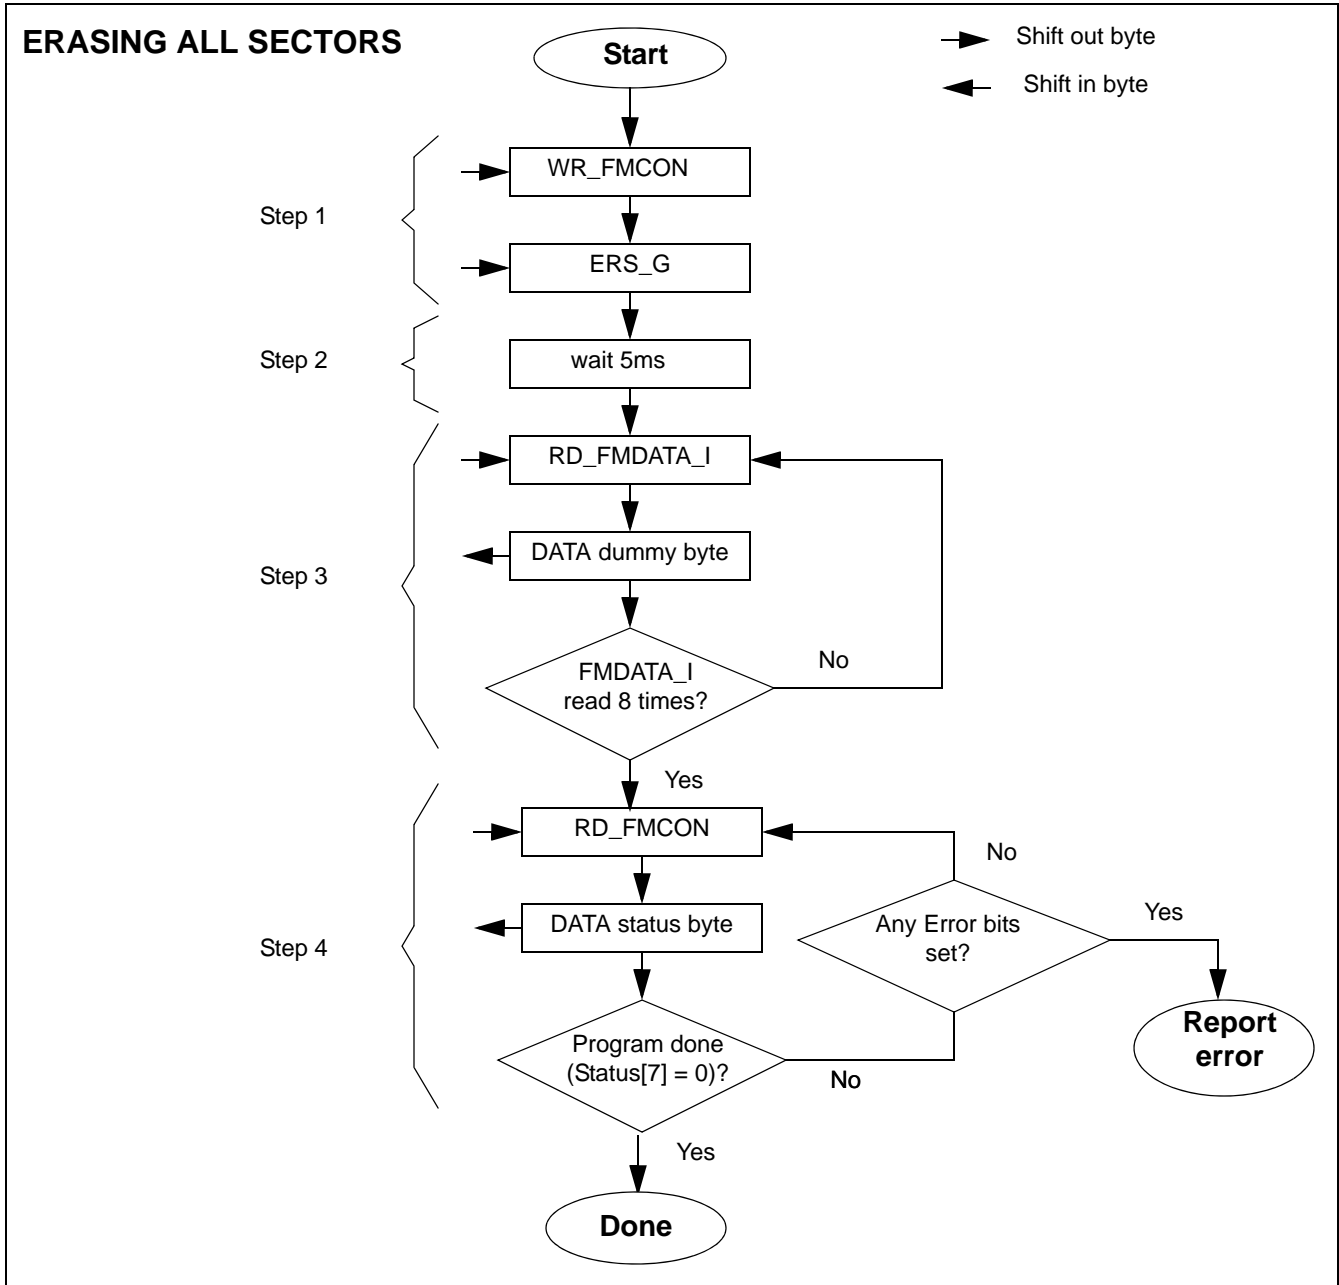


Figure 1: Flowchart ICP Global Erase

**RESET.1: External reset does not function correctly when using DIVM**

**Introduction:** The LPC912 can be set up to use either an internal reset or an external reset pin on P1.5. The DIVM register can be used to divide down the internal CCLK down.

**Problem:** When the LPC912 is configured to have an external reset pin on P1.5 and in the program the DIVM register is programmed to a value different from 0x00 to slow down CCLK, then the next reset pulse will not generate a proper reset for the LPC912. A power cycle has to be applied for the LPC912 to start up again properly.

**Workaround:** Use the internal reset function.

**DIVM.1: Using DIVM in power-down mode**

**Introduction:** The LPC912 has a DIVM register that can be used to divide the cclk down. Using DIVM can greatly reduce power when in active mode.

**Problem:** When DIVM is used in active mode and power-down mode is then entered the LPC912 can not be waken up from power down mode.

**Workaround:** Before entering powerdown mode set DIVM back to 0x00. This way the LPC912 will be operating full speed for one instruction before entering power-down mode. After the LPC912 has been waken up DIVM can be set back to its original value.

**I/O.3: Port 3.0 can be an output during a power-up cycle**

**Introduction:** The LPC912 can be selected to be clocked by an internal RC oscillator. When the internal RC oscillator is selected, P3.0 and P3.1 (which would be used for the crystal oscillator circuit) pins can now be used as general purpose IO pins.

**Problem:** When the LPC912 is powered up the configuration of the UCFG1 is read out and the LPC912 configured accordingly. The UCFG1 gets read out on the low brownout level of the LPC912 (typically around 2.3V). Before the UCFG1 is read out the crystal oscillator circuit might be enabled. When the crystal circuit is enabled P3.0 is driven to the inverse state of P3.1.

**Workaround:** Please make sure your external circuitry connected to P3.0 is not affected by this behavior. Otherwise it is recommended to switch to a different port pin.

**Electrical and Timing Specification Deviations of P89LPC912**

No known erratas.

## Errata Notes

### **V<sub>DD</sub>.1: V<sub>DD</sub> Power cycling**

To generate a proper Power-On-Reset (POR), V<sub>DD</sub> must have dropped below 0.2V before being powered back up. Power-cycling without V<sub>DD</sub> having dropped below 0.2V may result in incorrect Program Counter values.

Please also see the V<sub>POR</sub> specification in LPC912 Datasheet, DC electrical characteristics. Section 8.15 (Reset) states that during a power cycle, V<sub>DD</sub> must fall below V<sub>POR</sub>.

### **IRC.1: Internal RC oscillator accuracy**

To be able to guarantee the Internal RC oscillator accuracy over the full operating range the V<sub>DD</sub> supply has to be decoupled sufficiently. Sufficient decoupling is dependant on the noise level in the application, typically a 0.1uF should be sufficient for most applications.

Noise on the V<sub>DD</sub> supply pins can cause the Internal RC oscillator to go slightly outside of the specified range.